



Product line

An overview of our product range

Your expert for automotive workshop equipment since 1997!



twinbusch.co.uk

Lifts
Tyre changers
Wheel balancers
and much more!



Quality
that convinces!



Twin Busch UK LTD
9, Linnell Way
Telford Way Industrial Estate
NN16 8PS, Kettering (Northants)
+44 (0) 1536 522 960
info@twinbusch.co.uk



Basic-Line 2-Post-Lift

Item No.: TW242GE

kg 4200 kg **↑ 1,60 m** **⚡ 230 V** **⚙ Autom.**

Garage Model

Recomended for garages with limited space



Description

Garage Model - Recomend for garages with limited space and low ceilings. The TW242GE is designed for Garages with limited space, with it's width of 3 meters and a post height of 2,32 meters it is perfect for normal garages. With adjustable lifting pads and a flat floor plate of 35 cm.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- **Width only 3 m**
- **Post height 2,32 m**
- **Lifting height 1,60 m**
- Perfect for normal garages
- Mechanical safety locking mechanism
- High quality special profile supporting posts
- 2 Hydraulic cylinders for powerful lifting and lowering
- Automatic arm-locking system
- Steel cable synchronization
- Dual manual unlocking
- Telescopic lifting arms
- Asymmetric lifting-arms

Delivery contents




- Lift incl. Power unit
- Heavy duty anchor bolts (10 pcs.)
- Rubber door protectors
- English instruction manual
- Examination book and CE-Certificate
- **Assembly video online | Product video online**

Videos





Note try our technical decision helper (on page 5) before buying your 2-post lift(s)!

Vehicle type / Wheelbase

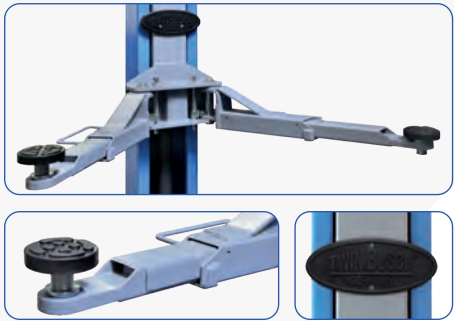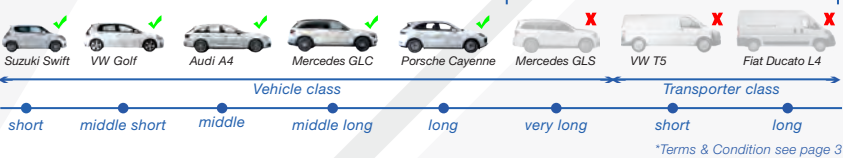

Dimensions

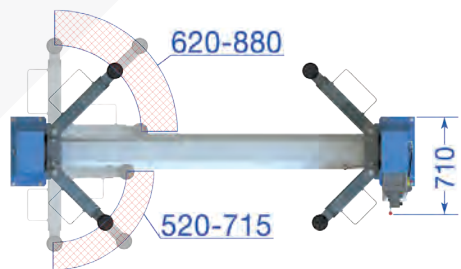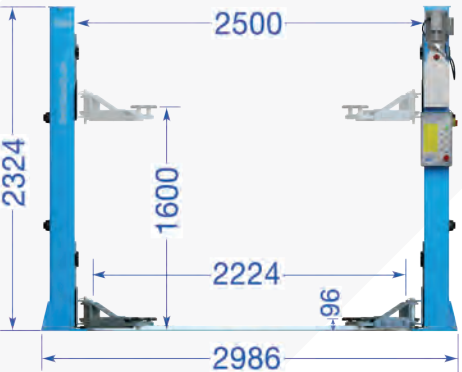

If space is a problem, the lift can also be constructed narrower than the specified total width!
How it works? Contact us!


Technical data

| | |
|----------------------------------|-----------------|
| Lifting capacity | 4200 kg |
| Lifting height max. | 1600 mm/Ad 1740 |
| Lowest lifting point | 96 mm |
| Lifting, lowering time (approx.) | 45/30 sec. |
| Power supply | 230 V |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 540 kg |

Further information to be found at www.twinbusch.co.uk

Optional accessory

Transporter adapters (4 pcs.)



Through experience the required concrete depth(foundation requirement of 200 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer on page 19 a special solution, which can be used with a concrete thickness of 150 mm to 200 mm.

Further accessories can be found at www.twinbusch.co.uk

Basic-Line 2-Post-Lift

Item No.: TW242M / TW242M-G

kg 4200 kg **↑** 1,90 m **⚡** 230 V **🔧** Semi-auto.

Description

The ideal starter model with a TOP price - performance ratio. Our starter model is now better than ever, with 4 height adjustable lifting pads and a very low drive-over (only 35 mm). With our Basic-line lift, it is possible to lift anything from a Smart to a small transporter. Manual release on one side only / single lock / one-hand release.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- **Manual release on one side only / single lock / one-hand release**
- High quality special profile supporting posts
- 2 Hydraulic cylinders for powerful lifting and lowering
- Automatic arm-locking system
- Steel cable synchronization
- Duel manual unlocking
- Telescopic lifting arms | Asymmetric lifting-arms
- Easy to use control unit (Safety rate to IP 54)
- Height-adjustable lifting pads


Delivery contents

- Lift incl. Power unit
- Heavy duty anchor bolts (10 pcs.)
- Rubber door protectors
- English instruction manual
- Examination book and CE-Certificate
- **Assembly video online**
- **Product video online**

Choice of colour:

 **RAL 5015**
TW242M

or

 **RAL 7016**
TW242M-G



Note try our technical decision helper (on page 5) before buying your 2-post lift(s)!




Product video




Assembly video



Vehicle type / Wheelbase

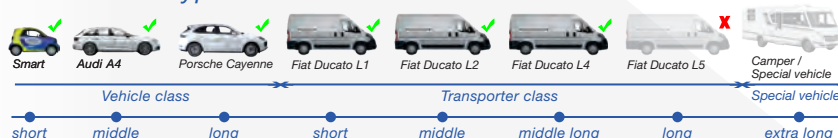

*Terms & Condition see page 37



Dimensions

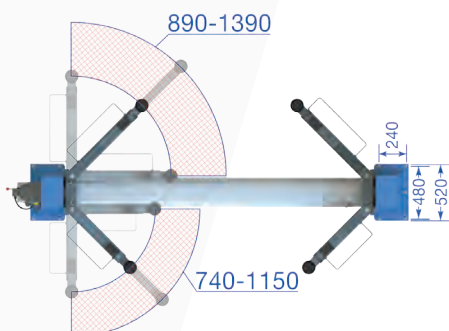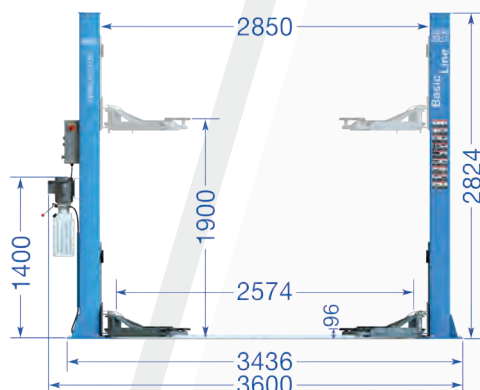

If space is a problem, the lift can also be constructed narrower than the specified total width!
How it works? Contact us!

Technical data

| | |
|----------------------------------|-----------------|
| Lifting capacity | 4200 kg |
| Lifting height max. | 1900 mm/Ad 2050 |
| Lowest lifting point | 96 mm |
| Lifting, lowering time (approx.) | 45/30 sec. |
| Power supply | 230 V |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 600 kg |

Further information to be found at www.twinbusch.co.uk

Optional accessory

Transporter adapters (4 pcs.)



Column chain guard

Item No.: TWSAK



Through experience the required concrete depth (foundation requirement of 200 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer on page 19 a special solution, which can be used with a concrete thickness of 150 mm to 200 mm.



LED lighting (LED-KIT) for 2-post lifts (Item No.: TWLED-2)



Further accessories can be found at www.twinbusch.co.uk



Basic-Line 2-Post-Lift

Item No.: TW242M-FZ

Hot-dip galvanized

kg 4200 kg **1,90 m** **230 V** **Semi-auto.**





The control unit can be separated from the vehicle lift by a quick coupling, thus the lift is also suitable for outdoor use.



Hose length: approx. 50 cm

Included




Column chain guard

Note try our technical decision helper (on page 5) before buying your 2-post lift(s)!

Videos



Vehicle type / Wheelbase

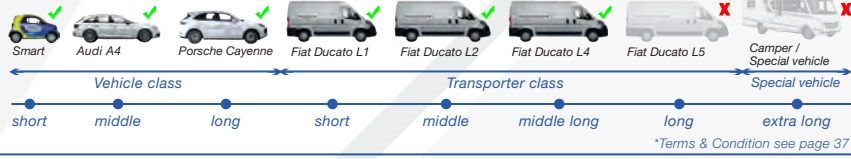

Description



The TW242M-FZ is specially designed for outdoor use. It is fully galvanized and thus optimally protected against corrosion. The control unit can be disconnected from the lifting platform via a quick coupling, so that it can be brought indoors when not in use. The steel cables for synchronization are made of stainless steel. The TW242M-FZ has height-adjustable turntables and a flat drive-over plate (only 35 mm). With the TW242M-FZ everything can be lifted from small cars up to vans. *Manual release on one side only / single lock / one-hand release.*

Features



- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- **Manual release on one side only / single lock / one-hand release**
- Mechanical safety locking mechanism
- High quality special profile supporting posts
- 2 Hydraulic cylinders for powerful lifting and lowering
- Automatic arm-locking system
- **High quality full zinc coating**
- **Steel cable synchronization**
- Dual manual unlocking | Telescopic lifting arms
- **Separate and removable control unit**

Delivery contents

- Lift incl. Power unit
- Heavy duty anchor bolts (10 pcs.)
- Rubber door protectors | English instruction manual
- Examination book and CE-Certificate
- **Assembly video online | Product video online**

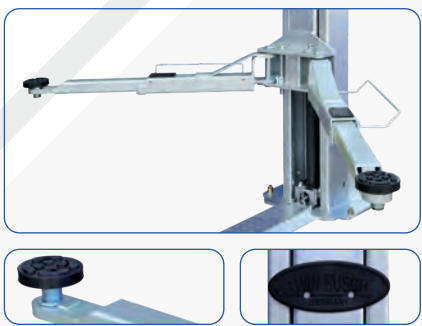

Dimensions

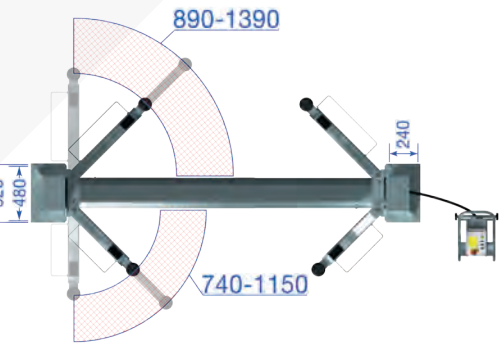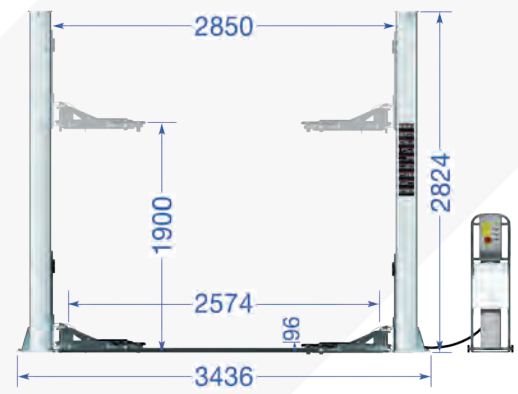

If space is a problem, the lift can also be constructed narrower than the specified total width! **How it works? Contact us!**

Technical data

| | |
|----------------------------------|-----------------|
| Lifting capacity | 4200 kg |
| Lifting height max. | 1900 mm/Ad 2050 |
| Lowest lifting point | 96 mm |
| Lifting, lowering time (approx.) | 45/30 sec. |
| Power supply | 230 V |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 600 kg |

Further information to be found at www.twinbusch.co.uk

Optional accessory

Transporter adapters (4 pcs.)



Through experience the required concrete depth(foundation requirement of 200 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer on page 19 a special solution, which can be used with a concrete thickness of 150 mm to 200 mm.

Further accessories can be found at www.twinbusch.co.uk

Basic-Line 2-Post-Lift

Item No.: TW242E / TW242E-G

kg 4200 kg **↑** 1,90 m **⚡** 230 V **⚙️** Autom.

Description

The Basic Line lift in electromagnetic version 4200 kg load capacity. With automatic unlockable safety latches, adjustable lifting pads, high-quality Powdercoating and flat bridge plate (only 35 mm). With the electromagnetic Basic Line you can lift everything from Smart to vans.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Automatic safety-lock release
- Rotary lifting plates with thread protection
- Emergency lowering in case of power cut
- High quality special profile supporting posts
- 2 Hydraulic cylinders for powerful lifting and lowering
- Automatic arm-locking system
- Quality powder coating
- Steel cable synchronization
- Extra flat telescopic lifting arms for sport cars
- Asymmetric lifting-arms
- Easy to use control unit. (Safety rate to IP 54)


Delivery contents

- Lift incl. Power unit
- Heavy duty anchor bolts (10 pcs.)
- Rubber door protectors
- English instruction manual
- Examination book and CE-Certificate
- **Assembly video online | Product video online**

Choice of colour:

 **RAL 5015**
TW242E

or

 **RAL 7016**
TW242E-G



Note try our technical decision helper (on page 5) before buying your 2-post lift(s)!



Videos




Product video



Assembly video



Vehicle type / Wheelbase



Dimensions

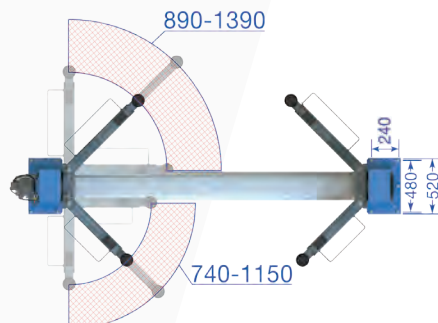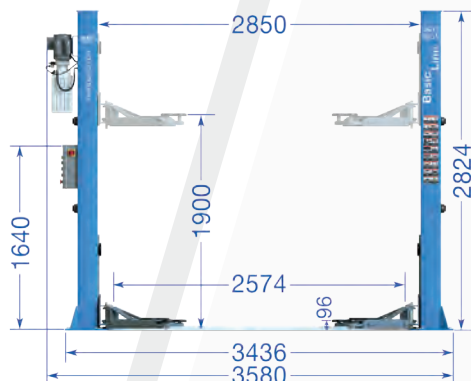

If space is a problem, the lift can also be constructed narrower than the specified total width!
How it works? Contact us!

Technical data

| | |
|----------------------------------|-----------------|
| Lifting capacity | 4200 kg |
| Lifting height max. | 1900 mm/Ad 2050 |
| Lowest lifting point | 96 mm |
| Lifting, lowering time (approx.) | 45/30 sec. |
| Power supply | 230 V |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 600 kg |


Further information to be found at www.twinbusch.co.uk

Optional accessory

Transporter adapters (4 pcs.)



Column chain guard
Item No.: TWSAK



Through experience the required concrete depth (foundation requirement of 200 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer on page 19 a special solution, which can be used with a concrete thickness of 150 mm to 200 mm.



LED lighting (LED-KIT) for 2-post lifts (Item No.: TWLED-2)



Further accessories can be found at www.twinbusch.co.uk



Profi-Line 2-Post-Lift

Item No.: TW236PE

kg 3600 kg **↑ 1,90 m** **⚡ 400 V** **⚙ Autom.**



230 V socket placed in the control box

Note try our technical decision helper (on page 5) before buying your 2-post lift(s)!

Included

Transporter adapters (4 pcs.)



Practical storage bracket for two extension adapters (2 pcs.)



Videos




Product video

Assembly video



Vehicle type / Wheelbase

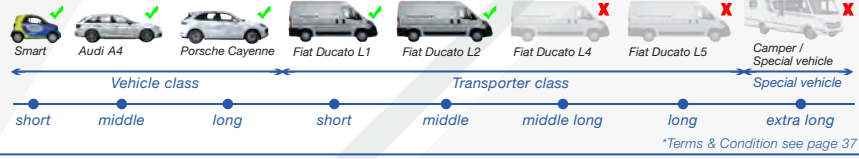

Description

The Profi-Line lift. With automatic safety latch locking and unlocking, adjustable rotary supports, high quality powdercoating and extremely flat floor plate (only 30 mm). The Profi-Line lifts everything from the Smart to vans.

Features


- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Column chain guard
- Automatic safety-lock release
- Rotary lifting plates with thread protection
- Emergency lowering in case of power cut
- High quality special profile supporting posts
- 2 Hydraulic cylinders for powerful lifting and lowering
- Automatic arm-locking system
- Quality powder coating
- Steel cable synchronization
- Extra flat telescopic lifting arms for sport cars
- **Anti-Lift-Up-Button**, allows you to lower the lift without it having to rise before sinking plus a 230 V Euro-socket placed in the control box.
- **NEW: Motor-Cover included**
- Stylish design, dust protection and noise reduction
- **Optional air connection (Air-Kit) available**

Delivery contents


- Lift incl. Power unit and Motor-Cover
- Heavy duty anchor bolts (10 pcs.)
- Transporter adapters (4 pcs.)
- Bracket for extension adapter
- Rubber door protectors | English instruction manual
- Examination book and CE-Certificate
- **Product video online | Assembly video online**



Dimensions

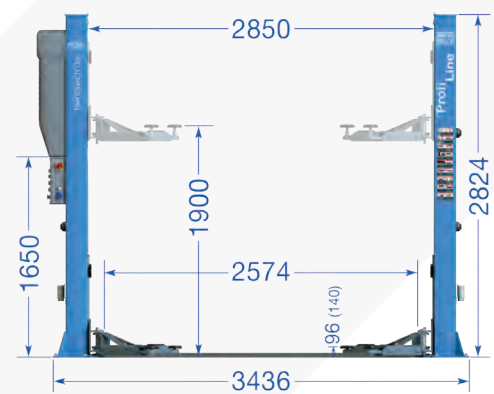

Technical Data

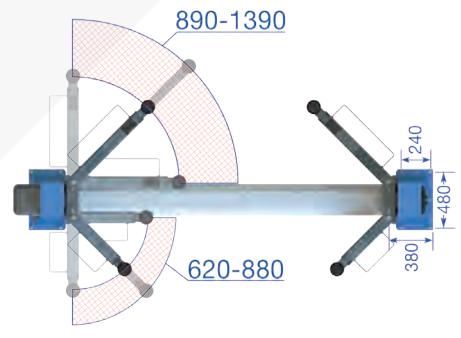

If space is a problem, the lift can also be constructed narrower than the specified total width!
How it works? Contact us!

| | |
|----------------------------------|-----------------|
| Lifting capacity | 3600 kg |
| Lifting height max. | 1900 mm/Ad 2080 |
| Lowest lifting point | 96 mm |
| Lifting, lowering time (approx.) | 45/30 sec. |
| Power supply | 400 V / 3 Phase |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 630 kg |

Further information to be found at www.twinbusch.co.uk

Optional accessory




Air-Kit (TW236PE-AIR)



Through experience the required concrete depth (foundation requirement of 200 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer on page 19 a special solution, which can be used with a concrete thickness of 150 mm to 200 mm.



LED lighting (LED-KIT) for 2-post lifts (Item No.: TWLED-2)



Further accessories can be found at www.twinbusch.co.uk

Profi-Line 2-Post-Lift

Item No.: TW236PEB3.9 I-G

kg 3600 kg **↑ 1,90 m** **⚡ 400 V** **⚙ Autom.**

Description

The Profi-Line lift has an automatic safety lock release system, height adjustable lifting pads, transporter adapters, clear floor drive through and an automatic limit switch, which cuts off the power if a vehicle reaches the height limit.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Column chain guard
- Automatic safety lock-release system
- Special rolled section columns
- 2 Hydraulic cylinders for powerful lifting and lowering
- Automatic arm-locking-system
- Steel cable synchronization
- Telescopic lifting arms
- **Anti-Lift-Up-Button**, allows you to lower the lift without it having to rise before sinking plus a 230 V Euro-socket placed in the control box.
- **NEW: Motor-Cover included**
Stylish design, dust protection and noise reduction
- **Optional air connection (Air-Kit) available**

Delivery contents


- Lift incl. Power unit and Motor-Cover
- Heavy duty anchor bolts (10 pcs.)
- Transporter adapters (4 pcs.)
- Bracket for extension adapter
- Rubber door protectors | English instruction manual
- Examination book and CE-Certificate
- **Product video online | Assembly video online**

Choice of colour:

RAL 5015 TW236PEB3.9
RAL 7016 TW236PEB3.9-G



230 V socket placed in the control box

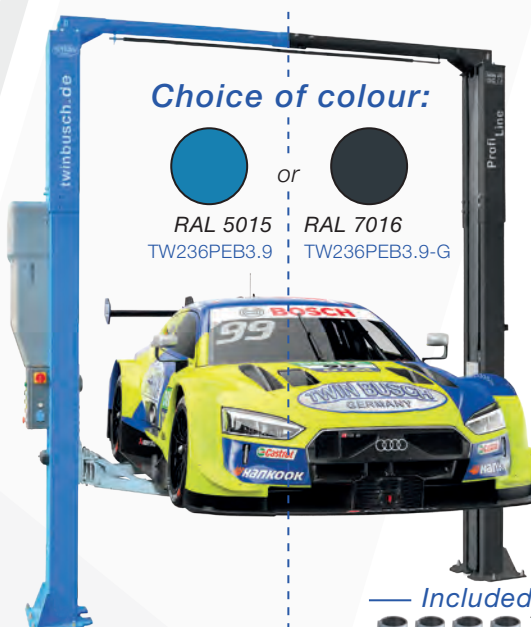

Included

Transporter adapters 4 pcs.

Practical storage bracket for two extension adapters (2 pcs.)

Videos



Product video


Assembly video



Note try our technical decision helper (on page 5) before buying your 2-post lift(s)!





Vehicle type / Wheelbase

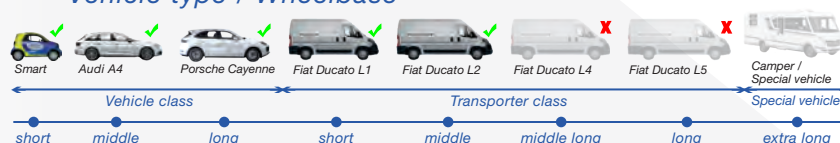

*Terms & Condition see page 37



Dimensions

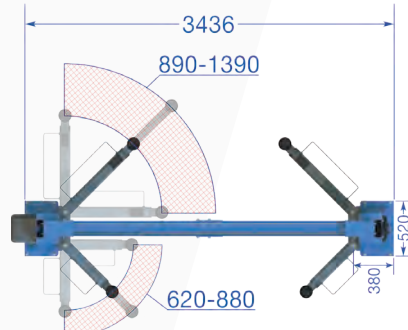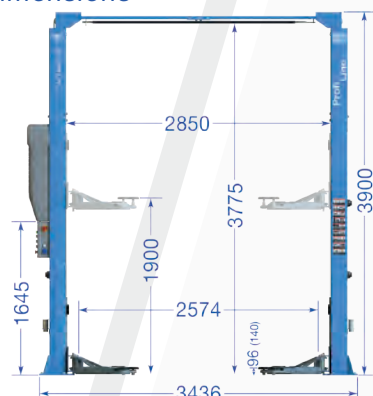

If space is a problem, the lift can also be constructed narrower than the specified total width!
How it works? Contact us!

Technical Data

| | |
|----------------------------------|-----------------|
| Lifting capacity | 3600 kg |
| Lifting height max. | 1900 mm/Ad 2080 |
| Lowest lifting point | 96 mm |
| Lifting, lowering time (approx.) | 45/30 sec. |
| Power supply | 400 V / 3 Phase |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 670 kg |

Further information to be found at www.twinbusch.co.uk

Optional accessory



Air-Kit (TW236PE-AIR)



Through experience the required concrete depth (foundation requirement of 200 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer on page 19 a special solution, which can be used with a concrete thickness of 150 mm to 200 mm.



LED lighting (LED-KIT) for 2-post lifts (Item No.: TWLED-2B)



Further accessories can be found at www.twinbusch.co.uk



Profi-Line 2-Post-Lift

Item No.: TW242PE

kg 4200 kg **1,90 m** **230 V or 400 V** **Autom.**

Description

The Profi-Line lift has an automatic safety lock release system, adjustable rotary supports, high quality powder coating and an extremely flat floor plate (only 30 mm). The Profi-Line lifts everything from the Smart to vans.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Column chain guard
- Automatic safety-lock release
- Rotary lifting plates with thread protection
- Emergency lowering in case of power cut
- High quality special profile supporting posts
- 2 Hydraulic cylinders for powerful lifting and lowering
- Automatic arm-locking system
- Quality powder coating
- Steel cable synchronization
- Extra flat telescopic lifting arms for sport cars
- **Anti-Lift-Up-Button**, allows you to lower the lift without it having to rise before sinking plus a 230 V Euro-socket placed in the control box.
- **NEW: Motor-Cover included**
Stylish design, dust protection and noise reduction
- **Optional air connection (Air-Kit) available**

Delivery contents

- Lift incl. Power unit and Motor-Cover
- Heavy duty anchor bolts (10 pcs.)
- Transporter adapters (4 pcs.)
- Bracket for extension adapter
- Rubber door protectors | English instruction manual
- Examination book and CE-Certificate
- **Product video online | Assembly video online**



Note try our technical decision helper (on page 5) before buying your 2-post lift(s)!

Included

Transporter adapters (4 pcs.)



Practical storage bracket for two extension adapters (2 pcs.)



Videos




Product video




Assembly video



Vehicle type / Wheelbase

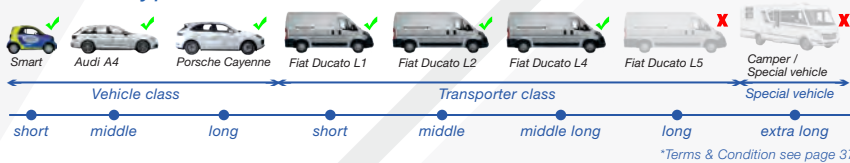


Dimensions

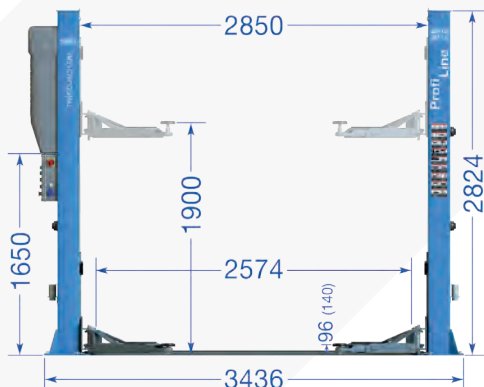

Technical Data

| | |
|----------------------------------|-----------------|
| Lifting capacity | 4200 kg |
| Lifting height max. | 1900 mm/Ad 2080 |
| Lowest lifting point | 96 mm |
| Lifting, lowering time (approx.) | 45/30 sec. |
| Power supply | 400 V / 230 V |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 650 kg |

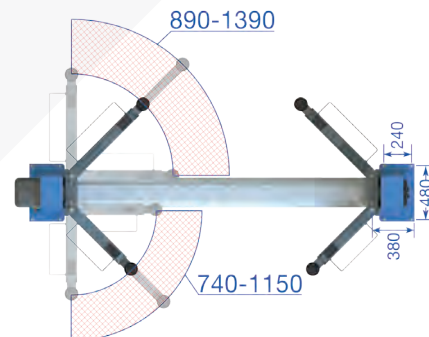

If space is a problem, the lift can also be constructed narrower than the specified total width!
How it works? Contact us!

Further information to be found at www.twinbusch.co.uk

Optional accessory



Air-Kit (TW236PE-AIR)



Through experience the required concrete depth (foundation requirement of 200 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer on page 19 a special solution, which can be used with a concrete thickness of 150 mm to 200 mm.



LED lighting (LED-KIT) for 2-post lifts (Item No.: TWLED-2)



Further accessories can be found at www.twinbusch.co.uk

Profi-Line 2-Post-Lift

Item No.: TW242PEB4.3 I-G

kg 4200 kg **↑ 1,90 m** **⚡ 400 V** **⚙ Autom.**



Description

The Profi-Line lift has an automatic safety lock release system, height adjustable lifting pads, transporter adapters, clear floor drive through and an automatic limit switch, which cuts off the power if a vehicle reaches the height limit.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Column chain guard
- Automatic safety lock-release system
- Special rolled section columns
- 2 Hydraulic cylinders for powerful lifting and lowering
- Automatic arm-locking-system
- Steel cable synchronization
- Telescopic lifting arms
- **Anti-Lift-Up-Button**, allows you to lower the lift without it having to rise before sinking plus a 230 V Euro-socket placed in the control box.
- **NEW: Motor-Cover included**
Stylish design, dust protection and noise reduction
- **Optional air connection (Air-Kit) available**

Delivery contents


- Lift incl. Power unit and Motor-Cover
- Heavy duty anchor bolts (10 pcs.)
- Transporter adapters (4 pcs.)
- Bracket for extension adapter
- Rubber door protectors | English instruction manual
- Examination book and CE-Certificate
- **Product video online | Assembly video online**

Choice of colour:

RAL 5015 TW242PEB4.3 **or** **RAL 7016** TW242PEB4.3-G



230 V socket placed in the control box

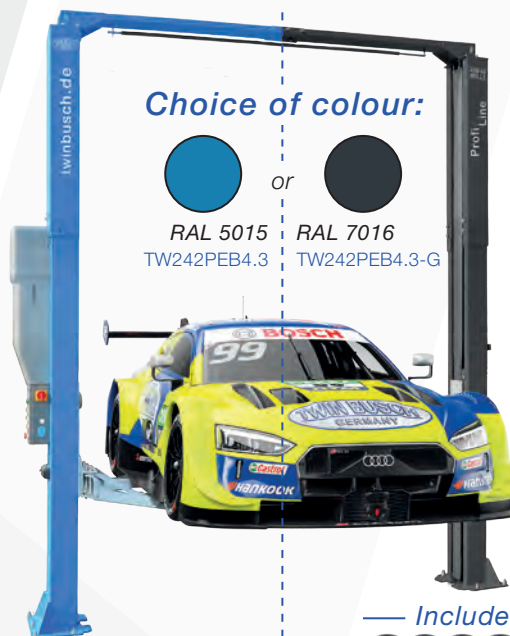

Included

Transporter adapters 4 pcs.

Practical storage bracket for two extension adapters (2 pcs.)

Videos



Product video


Assembly video



Note try our technical decision helper (on page 5) before buying your 2-post lift(s)!





Vehicle type / Wheelbase

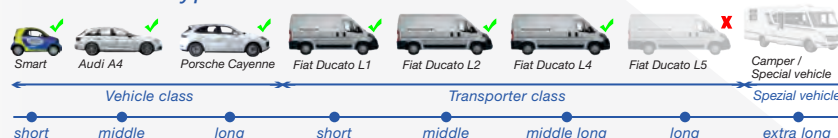

*Terms & Condition see page 37



Dimensions

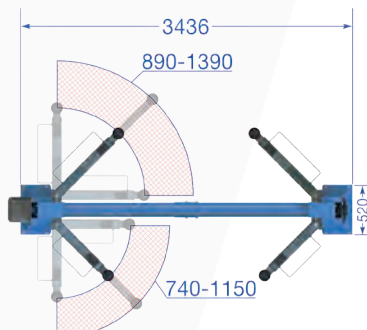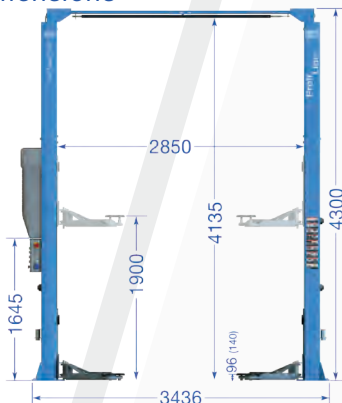

If space is a problem, the lift can also be constructed narrower than the specified total width!
How it works? Contact us!

Technical Data

| | |
|----------------------------------|-----------------|
| Lifting capacity | 4200 kg |
| Lifting height max. | 1900 mm/Ad 2080 |
| Lowest lifting point | 96 mm |
| Lifting, lowering time (approx.) | 45/30 sec. |
| Power supply | 400 V / 3 Phase |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 700 kg |

Further information to be found at www.twinbusch.co.uk

Optional accessory



Through experience the required concrete depth (foundation requirement of 200 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer on page 19 a special solution, which can be used with a concrete thickness of 150 mm to 200 mm.



LED lighting (LED-KIT) for 2-post lifts (Item No.: TWLED-2B)



Further accessories can be found at www.twinbusch.co.uk



Heavy-Line 2-Post-Lift

Item No.: TW250

kg 5000 kg **↑ 1,90 m** **⚡ 400 V** **⚙ Autom.**




Note try our technical decision helper (on page 5) before buying your 2-post lift(s)!

Included

Transporter adapters (4 pcs.)



Bracket for extension adapter (2 pcs.)



Videos




Product video



Assembly video



Vehicle type / Wheelbase

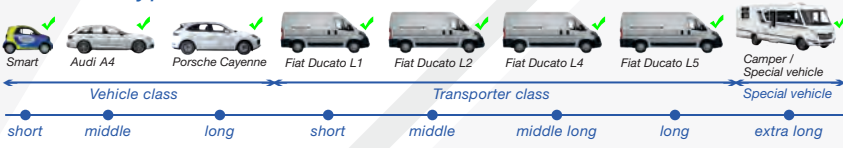

*Terms & Condition see page 37

Description

This professional lift has a lifting capacity of 5.0 t and 3-stage telescopic lifting arms enabling you to lift anything from a small car to a transporter or a camper with a long wheelbase.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Column chain guard
- Automatic safety-lock-release system
- Automatic arm-locking system
- 2 Hydraulic cylinders for powerful lifting and lowering
- Steel cable synchronization
- Special rolled section columns
- 3-stage telescopic lifting arms
- **Anti-Lift-Up-Button**, allows you to lower the lift without it having to rise before sinking plus a 230 V Euro-socket placed in the control box.
- **NEW: Motor-Cover included**
- Stylish design, dust protection and noise reduction
- **Optional air connection (Air-Kit) available**


Delivery contents

- Lift incl. Power unit and Motor-Cover
- Heavy duty anchor bolts (12 pcs.)
- Transporter adapters (4 pcs.)
- Bracket for extension adapter
- Rubber door protectors | English instruction manual
- Examination book and CE-Certificate
- **Product video online | Assembly video online**




Dimensions

*The height measurement is without plastic cover (cover is optional)

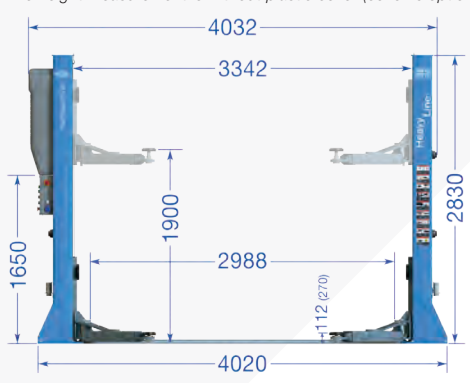

Technical Data

| | |
|----------------------------------|-----------------|
| Lifting capacity | 5000 kg |
| Lifting height max. | 1900 mm/Ad 2080 |
| Lowest lifting point | 112 mm |
| Lifting, lowering time (approx.) | 45/30 sec. |
| Power supply | 400 V / 3 Phase |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 970 kg |

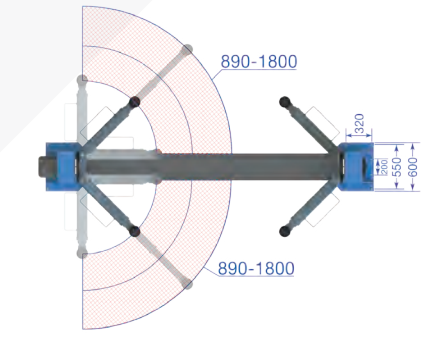

If space is a problem, the lift can also be constructed narrower than the specified total width!
How it works? Contact us!

Optional accessory



Through experience the required concrete depth (foundation requirement of 250 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer on page 19 a special solution, which can be used with a concrete thickness of 200 mm to 250 mm.

Wheel gripper (set of 4)
Item No.: TW260RAD



LED lighting (LED-KIT) for 2-post lifts
Item No.: TWLED-2



Further accessories can be found at www.twinbusch.co.uk

Heavy-Line 2-Post-Lift

Item No.: TW250B4.5

kg 5000 kg **↑** 1,90 m **⚡** 400 V **⚙️** Autom.

Description

This professional lift has a lifting capacity of 5.0 t and 3-stage telescopic lifting arms enabling you to lift anything from a small car to a transporter or a camper with a long wheelbase. With a height of 4450 mm, you can lift vehicles such as Fiat Ducato or a Mercedes sprinter e.g.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Column chain guard
- Automatic safety-lock-release system
- Automatic arm-locking system
- Two hydraulic cylinders provide powerful lifting and lowering
- Steel cable synchronization
- Special rolled section columns
- 3-stage telescopic lifting arms
- **Anti-Lift-Up-Button**, allows you to lower the lift without it having to rise before sinking plus a 230 V Euro-socket placed in the control box.
- **NEW: Motor-Cover included**
- Stylish design, dust protection and noise reduction
- **Optional air connection (Air-Kit) available**

Delivery contents

- Lift incl. Power unit and Motor-Cover
- Heavy duty anchor bolts (12 pcs.)
- Transporter adapters (4 pcs.)
- Bracket for extension adapter
- Rubber door protectors | English instruction manual
- Examination book and CE-Certificate
- **Product video online | Assembly video online**



Included

 Transporter adapters
4 pcs.

Practical storage bracket for two extension adapters (2 pcs.)



Videos



Product
video


Assembly
video



Note try our technical decision helper (on page 5) before buying your 2-post lift(s)!





Vehicle type / Wheelbase

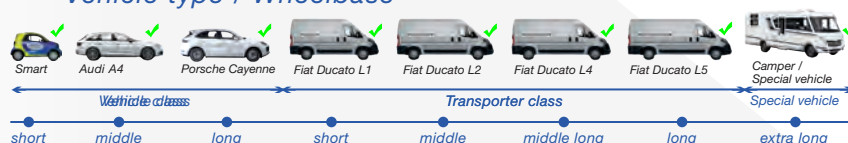

*Terms & Condition see page 37



Dimensions

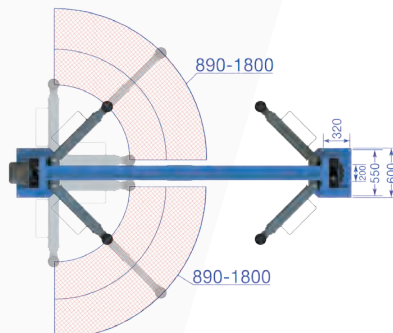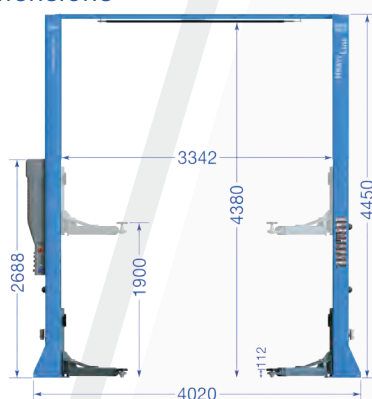

If space is a problem, the lift can also be constructed narrower than the specified total width!
How it works? Contact us!

Technical Data

| | |
|----------------------------------|-----------------|
| Lifting capacity | 5000 kg |
| Lifting height max. | 1900 mm/Ad 2080 |
| Lowest lifting point | 112 mm |
| Lifting, lowering time (approx.) | 45/30 sec. |
| Power supply | 400 V / 3 Phase |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 1070 kg |

Further information to be found at www.twinbusch.co.uk

Optional accessory



Through experience the required concrete depth (foundation requirement of 250 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer on page 19 a special solution, which can be used with a concrete thickness of 200 mm to 250 mm.

Wheel gripper (set of 4)
Item No.: TW260RAD



LED lighting (LED-KIT)
for 2-post lifts
(Item No.: TWLED-2B)



Further accessories can be found at www.twinbusch.co.uk

Heavy-Line 2-Post-Lift

Item No.: TW260

kg 6000 kg **↑ 1,90 m** **⚡ 400 V** **⚙ Autom.**

Description

This professional lift has a lifting capacity of 6.0 t and 3-stage telescopic lifting arms enabling you to lift anything from a small car to a transporter or a camper with a long wheelbase.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Column chain guard
- Automatic safety-lock-relase system
- Automatic arm-locking system
- 2 Hydraulic cylinders for powerful lifting and lowering
- Steel cable synchronization
- Special rolled section columns
- 3-stage telescopic lifting arms
- **Anti-Lift-Up-Button**, allows you to lower the lift without it having to rise before sinking plus a 230 V Euro-socket placed in the control box.
- **NEW: Motor-Cover included**
- Stylish design, dust protection and noise reduction
- **Optional air connection (Air-Kit) available**

Delivery contents

- Lift incl. Power unit and Motor-Cover
- Heavy duty anchor bolts (12 pcs.)
- Transporter adapters (4 pcs.)
- Bracket for extension adapter
- Rubber door protectors | English instruction manual
- Examination book and CE-Certificate
- **Product video online | Assembly video online**



Note try our technical decision helper (on page 5) before buying your 2-post lift(s)!

Included

Transporter adapters (4 pcs.)




Bracket for extension adapter (2 pcs.)



Videos



Vehicle type / Wheelbase


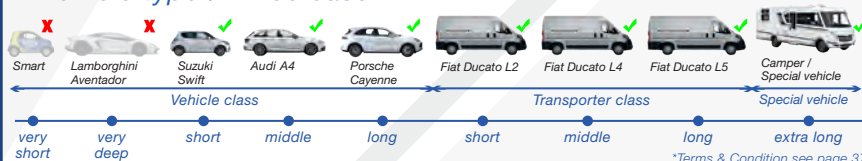


*Terms & Condition see page 37



Dimensions

*The height measurement is without plastic cover (cover is optional)

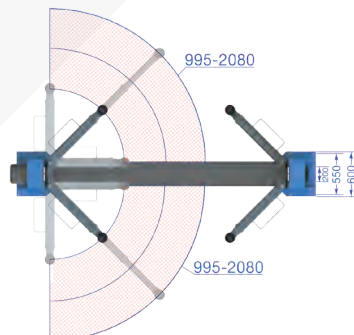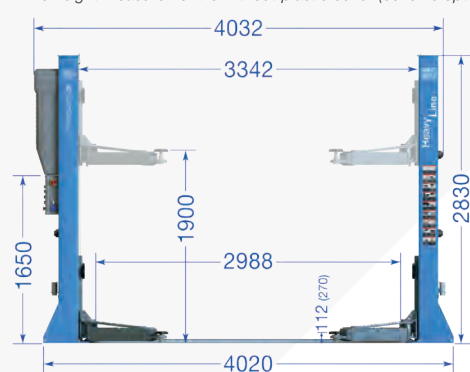

If space is a problem, the lift can also be constructed narrower than the specified total width!
How it works? Contact us!

Technical Data

| | |
|----------------------------------|-----------------|
| Lifting capacity | 6000 kg |
| Lifting height max. | 1900 mm/Ad 2080 |
| Lowest lifting point | 112 mm |
| Lifting, lowering time (approx.) | 45/30 sec. |
| Power supply | 400 V / 3 Phase |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 1020 kg |

Further information to be found at www.twinbusch.co.uk

Optional accessory



Through experience the required concrete depth (foundation requirement of 250 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer on page 19 a special solution, which can be used with a concrete thickness of 200 mm to 250 mm.

Wheel gripper (set of 4)
Item No.: TW260RAD



Further accessories can be found at www.twinbusch.co.uk

Heavy-Line 2-Post-Lift

Item No.: TW260B4.5

kg 6000 kg **↑ 1,90 m** **⚡ 400 V** **⚙ Autom.**



Description

This professional lift has a lifting capacity of 6.0 t and 3-stage telescopic lifting arms enabling you to lift anything from a small car to a transporter or a camper with a long wheelbase. With a height of 4450 mm, you can lift vehicles such as Fiat Ducato or a Mercedes sprinter e.g.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Column chain guard
- Automatic safety-lock-release system
- Automatic arm-locking system
- Two hydraulic cylinders provide powerful lifting and lowering
- Steel cable synchronization
- Special rolled section columns
- 3-stage telescopic lifting arms
- **Anti-Lift-Up-Button**, allows you to lower the lift without it having to rise before sinking plus a 230 V Euro-socket placed in the control box.
- **NEW: Motor-Cover included**
Stylish design, dust protection and noise reduction
- **Optional air connection (Air-Kit) available**

Delivery contents

- Lift incl. Power unit and Motor-Cover
- Heavy duty anchor bolts (12 pcs.)
- Transporter adapters (4 pcs.)
- Bracket for extension adapter
- Rubber door protectors | English instruction manual
- Examination book and CE-Certificate
- **Product video online | Assembly video online**



Included

Transporter adapters
4 pcs.

Practical storage bracket for two extension adapters (2 pcs.)


Videos

Product video
Assembly video

Note try our technical decision helper (on page 5) before buying your 2-post lift(s)!





Vehicle type / Wheelbase

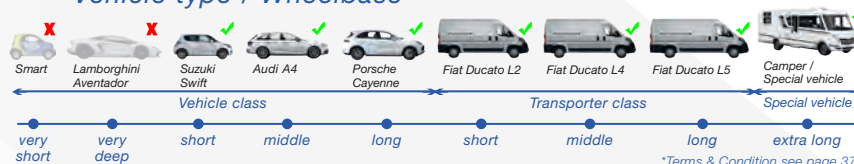

*Terms & Condition see page 37



Dimensions

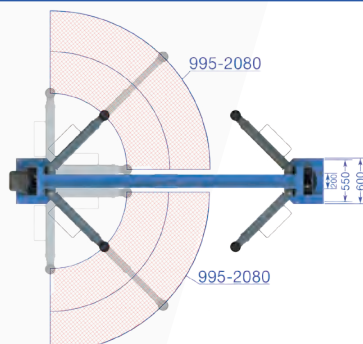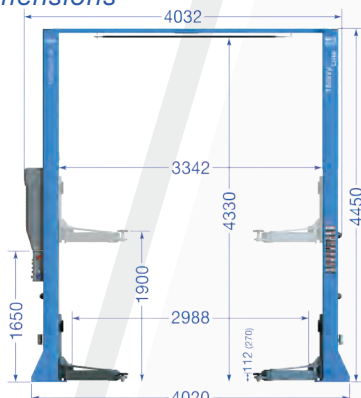

The 6 ton lifts have longer arms than the 5 ton lifts which will limit the type of cars which can be lifted but allows longer motorhomes to be lifted.

Technical Data

| | |
|----------------------------------|-----------------|
| Lifting capacity | 6000 kg |
| Lifting height max. | 1900 mm/Ad 2080 |
| Lowest lifting point | 112 mm |
| Lifting, lowering time (approx.) | 45/30 sec. |
| Power supply | 400 V / 3 Phase |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 1120 kg |


Further information to be found at www.twinbusch.co.uk

Optional accessory



Through experience the required concrete depth (foundation requirement of 250 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer on page 19 a special solution, which can be used with a concrete thickness of 200 mm to 250 mm.

Wheel gripper (set of 4)
Item No.: TW260RAD



LED lighting (LED-KIT)
for 2-post lifts
(Item No.: TWLED-2B)



Further accessories can be found at www.twinbusch.co.uk



Heavy-Line 2-Post-Lift

Item No.: TW280 / TW280-G

kg 8000 kg **↑** 1,90 m **⚡** 400 V **⚙️** Autom.

Description

With a lifting capacity of 8.0 tonnes and symmetrically telescoping double-jointed support arms in M-support arm design, the TW280 is our most powerful machine in the 2-post range. Thanks to its extremely large adjustment range, everything from small cars to vans, even with a long wheelbase (e.g. MB Sprinter, motorhomes, special vehicles) can be lifted with ease. With two operating units (one per column) and two independent hydraulic units, the TW280 offers a particularly high level of operating convenience and can be easily adapted to the requirements of the workshop in terms of installation width (4132 mm or less). As an outstanding highlight, the individual lifting columns communicate with each other completely wirelessly via a secure radio link. They are conveniently controlled via operating units on both columns with monitoring and display of the lifting height in real time. There is also a practical plug-in adapter holder on the outside of each column, which provides space for the safe storage of two height adapters.


Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Protective cover in front of the pillars
- Lifting turntables with double thread and anti-rotation protection
- Automatic electromagnetic release of the safety catches
- Automatic support arm lock | High quality powder coating
- 2 hydraulic cylinders for powerful lifting and lowering
- Synchronisation control via a secure radio connection
- High-quality support columns made from special rolled profile
- Symmetrical telescopic double-jointed support arms (M support arms) | Emergency lowering function
- Practical height adapter holders (one holder on each side of the column) for two height adapters each
- Motor-Cover included (Stylish design, dust protection and noise reduction)

Delivery contents

- Lift incl. Power unit and Motor-Cover
- Heavy duty anchor bolts (18 pcs.)
- Transporter adapters (4 pcs.) | Bracket for extension adapter
- English instruction manual | Examination book | CE-Certificate

Choice of colour:



Note try our technical decision helper (on page 5) before buying your 2-post lift(s)!

Included

Transporter adapters (4 pcs.)




Bracket for extension adapter (2 pcs.)




Videos





Vehicle type / Wheelbase

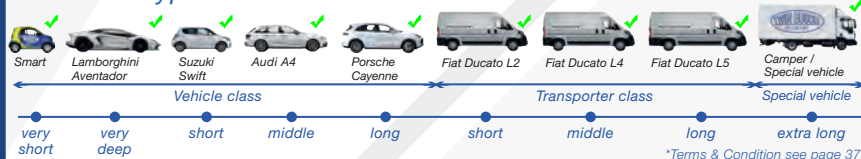

*Terms & Condition see page 37

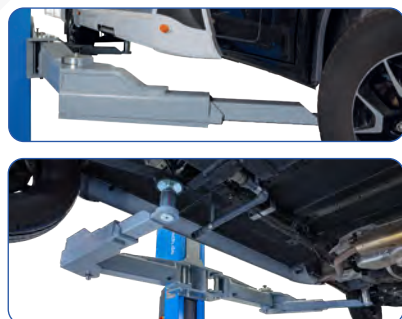

Dimensions

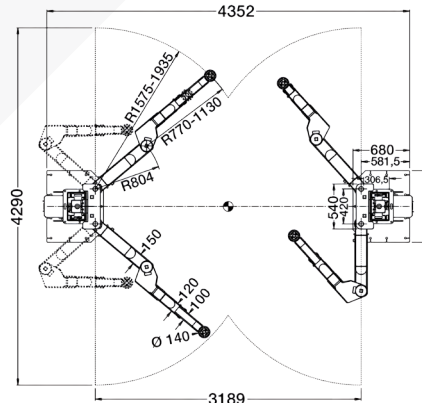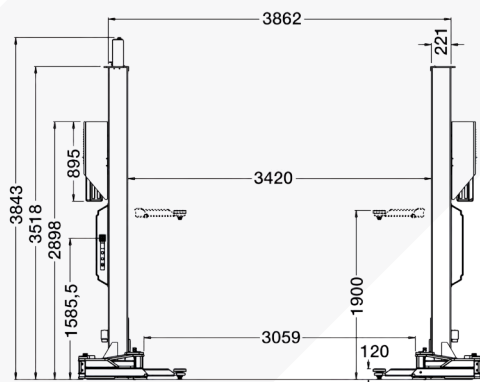

Technical Data

| | |
|----------------------------------|-----------------|
| Lifting capacity | 8000 kg |
| Lifting height max. | 1900 mm/Ad 2080 |
| Lowest lifting point | 120 mm |
| Lifting, lowering time (approx.) | 60/50 sec. |
| Power supply | 400 V / 3 Phase |
| Motor power | 2x 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 1768 kg |

Further information to be found at www.twinbusch.co.uk

Optional accessory




- Hydraulic Oil
Item No.: HLP32
- With wear protection
 - 5 Liter High performance hydraulic oil

Further accessories can be found at www.twinbusch.co.uk

Accessories for 2-Post-Lift

TW242G-GPV Baseplate reinforcement for TW242GE (Two reinforcing plates in the set, including heavy-duty anchor bolts)



Fits only the TW242GE (Garage Model)!

Please note, that the reinforcement plates are not needed in most cases.

Without reinforcing plates a minimum concrete thickness of 200 mm is required!

Through experience the required concrete depth (foundation requirement of 200 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer a special solution.

The minimum requirements with respect to the concrete strength are reduced by 50 mm, if the reinforcing plates are installed. This baseplate reinforcement is therefore to be used for concrete thickness between 150-200 mm.



TW242-GPV Baseplate reinforcement for 2-Post Lifts (Two reinforcing plates in the set, including heavy-duty anchor bolts)



For these Models (3.6 t - 4.2 t) > TW242M | 242E | 236PE | 236PEB3.9 | 242PE | 242PEB4.3

Please note, that the reinforcement plates are not needed in most cases.

Without reinforcing plates a minimum concrete thickness of 200 mm is required!


(For the mentioned 2-post lifts models with a load capacity of 3.6 t - 4.2 t).

Through experience the required concrete depth (foundation requirement of 200 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer a special solution.

The minimum requirements with respect to the concrete strength are reduced by 50 mm, if the reinforcing plates are installed. This baseplate reinforcement is therefore to be used for concrete thickness between 150-200 mm.



TW250-GPV Baseplate reinforcement for 2-Post Lifts (Two reinforcing plates in the set, including heavy-duty anchor bolts)



For these Models (5.0 t - 6.0 t) > TW250 | TW250B4.5 | TW260 | TW260B4.5

Please note, that the reinforcement plates are not needed in most cases.

Without reinforcing plates a minimum concrete thickness of 250 mm is required!

(For the mentioned 2-post lifts models with a load capacity of 5.0 t - 6.0 t).

Through experience the required concrete depth (foundation requirement of 250 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer a special solution.

The minimum requirements with respect to the concrete strength are reduced by 50 mm, if the reinforcing plates are installed. This baseplate reinforcement is therefore to be used for concrete thickness between 200-250 mm.



Special adapters

Item No.: TW260AD5 / TW240AD5

- Supplied in set of 4
- For sills higher than 20 mm.e. g. Citroen Jumpy, Peugeot Expert, 2007, Fiat Scudo
- TW 240 AD5 suitable for 3600 kg / 4200 kg-lifts
- TW 250 AD5 suitable for 5000 kg / 6000 kg-lifts

Important note (TW 250 AD5):

The diameter of the plug-in insert is 61 mm (not suitable for support arms with a diameter of 50 mm). Please measure accordingly.



Special adapters

Item No.: TW260AD6

- Supplied in set of 4
- For the frame work (e.g. US Cars such as Hummer H2)
- Suitable for TW 250 / TW 250 B4.5 (5000 kg)
- Suitable for TW 260 / TW 260 B4.5 (6000 kg)

Important note:

The diameter of the plug-in insert is 61 mm (not suitable for support arms with a diameter of 50 mm). Please measure accordingly.



Special adapters

Item No.: TW260AD3

- Supplied in set of 4
- (e.g. Citroen Jumper, Peugeot Boxer, 2006, Fiat Ducato)
- Suitable for TW 250 / TW 250 B4.5 (5000 kg)
- Suitable for TW 260 / TW 260 B4.5 (6000 kg)

Important note:

The diameter of the plug-in insert is 61 mm (not suitable for support arms with a diameter of 50 mm). Please measure accordingly.



Special adapters

Item No.: TW250AD2

- Supplied in set of 4
- (e. g. Mercedes Sprinter or VW crafter)
- Suitable for TW 250 and TW 250 B4.5 (5000 kg)
- Suitable for TW 260 and TW 260 B4.5 (6000 kg)

Important note:

The diameter of the plug-in insert is 61 mm (not suitable for support arms with a diameter of 50 mm). Please measure accordingly.



Special adapters

Item No.: TW250AD4

- Supplied in set of 4
- For sills higher than 20 mm.
- e. g. Citroen Jumpy, Peugeot Expert, 2007, Fiat Scudo
- TW 240 AD5 suitable for 3600 kg / 4200 kg-lifts
- TW 250 AD5 suitable for 5000 kg / 6000 kg-lifts

Important note:

The diameter of the plug-in insert is 61 mm (not suitable for support arms with a diameter of 50 mm). Please measure accordingly.



Height adapter

Item No.: TW250AD1

- Supplied in set of 4
- Suitable for TW 250 / TW 250 B4.5 (5000 kg)
- Suitable for TW 260 / TW 260 B4.5 (6000 kg)



Height adapter

Item No.: TW235AD09

- For Basic-Line, Profi-Line and Heavy-Line (4 x 90 mm = 1 set)



Air-Kit | Item No.: TW236PE-AIR

- Suitable for TW236PE, TW236PEB3.9, TW242PE, TW242PEB4.3, TW250, TW250B4.5, TW260 and TW260B4.5
- It is integrated in the motor cover above the control unit | ¼ inch air coupling
- Including a 2 m long 12 mm hose

Product
video



included:



Hydraulic Oil

Item No.: HLP32

- With wear protection
- 5 Liter High performance hydraulic oil



LED lighting (LED-KIT) for 2-post lifts with drive-over plate (Item No.: TWLED-2)

- Suitable for: TW242M, TW242M-G, TW242M-FZ, TW242E, TW242E-G, TW236PE, TW242PE, TW250, TW260
- Consisting of 4 flexible and magnetic LED strip lights / LED strips
- Incl. magnetic remote control



Product
video



LED lighting (LED-KIT) for barrier-free 2-post lifts (Item No.: TWLED-2B)

- Suitable for: TW236PEB3.9 /-G, TW242PEB4.3 /-G, TW250B4.5 and TW260B4.5
- Consisting of 4 flexible and magnetic LED strip lights / LED strips
- Incl. magnetic remote control



1-Post-Lift | fixed Item No.: TW125F

kg 2500 kg **↑ 1,93 m** **⚡ 230 V** **Semi-auto.**



For use in tight spaces



Description

Fixed one-post lift.
For use in tight spaces. Ideal for body work, paint shops and of course every day workshop use.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Hydraulic cylinder for powerful lifting
- Adjustable lifting pads
- Telescopic lifting arms
- Mechanical safety-locks
- Manual safety lock release
- Special rolled section columns
- Aluminum-motor with 24 V –Control box
- Column chain guard
- Fixed construction
- For use in tight spaces
- Easy to use control unit (Safety rate to IP 54)

Delivery contents

- Lift incl. Power unit
- Heavy duty anchor bolts (10 pcs.)
- English instruction manual
- Examination book
- CE-Certificate
- **Assembly video online**
- **Product video online**



Videos



Vehicle type / Wheelbase




Dimensions

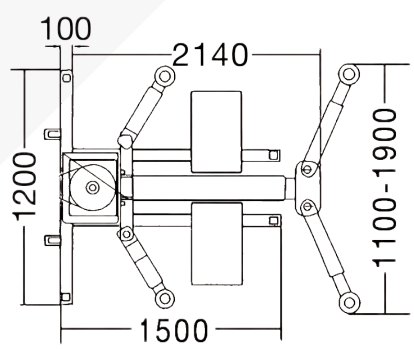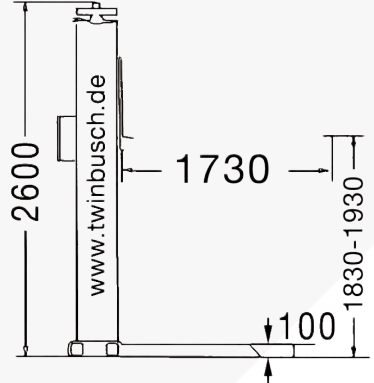

Technical Data

| | |
|----------------------------------|----------------|
| Lifting capacity | 2500 kg |
| Lifting height max. | 1830 - 1930 mm |
| Lowest lifting point | 115 mm |
| Lifting, lowering time (approx.) | 35/30 sec. |
| Power supply | 230 V |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 720 kg |

Optional accessory

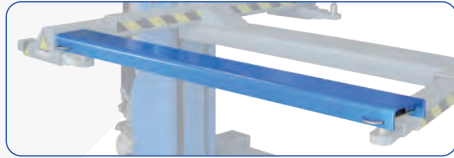

Cross beams for the 1-Post-Lift
Item No.: TW125-Q
(2 pcs. in the set)
Set of cross beams for lifting vehicles with narrow frames such as off-roadvehicles or pre-war vintage cars.

Further accessories can be found at www.twinbusch.co.uk

1-Post-Lift | mobile

Item No.: TW125M / TW125M-G

kg 2500 kg **↑ 1,93 m** **⚡ 230 V** **🔧 Semi-auto.**

Description

Mobile, ultra flat 1-post lift.

NEW: The extremely low frame height of only 85 mm and a lowest lifting height of just 98 mm. Our TOP model 1-post lift is practical in every way. The one post mobile lift is ideal for use in tight spaces; it can be moved as easily as a pallet truck on all smooth hard surfaces.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Hydraulic cylinder for powerful lifting
- Adjustable lifting pads
- Telescopic lifting arms
- Mechanical safety-locks
- Manual safety lock release
- Special rolled section columns
- Aluminum-motor with 24 V -Control box
- Column chain guard
- For use in tight spaces
- Easy to use control unit (Safety rate to IP 54)


Delivery contents

- Lift incl. Power unit
- English instruction manual
- Examination book
- CE-Certificate
- Assembly video online
- Product video online



Choice of colour:

 **RAL 5015**
TW125M

 **RAL 7016**
TW125M-G



Ultra-flat construction



Videos

YouTube




Product video


Assembly video





Vehicle type / Wheelbase

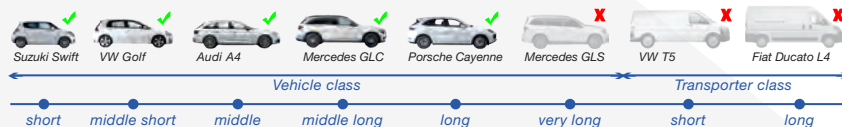

*Terms & Condition see page 37

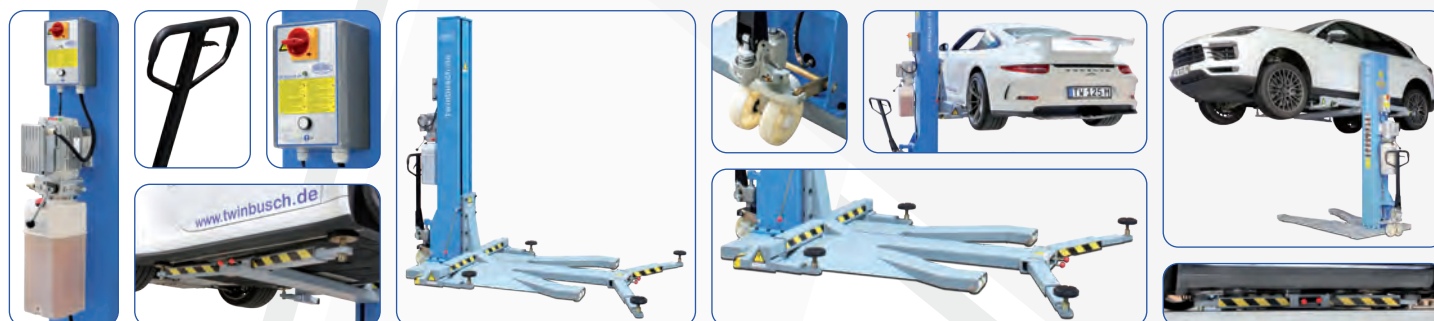

Dimensions

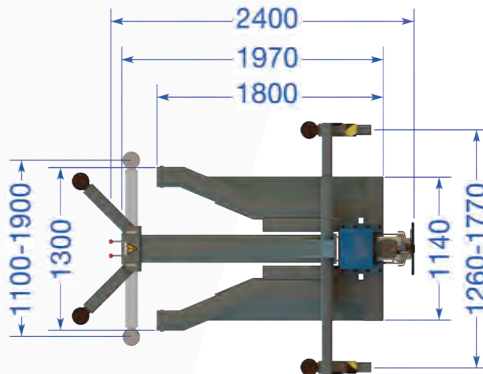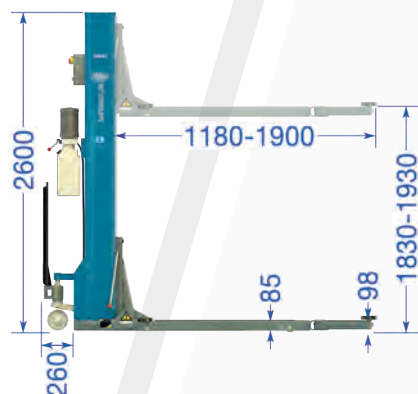

Technical Data

| | |
|----------------------------------|----------------|
| Lifting capacity | 2500 kg |
| Lifting height max. | 1830 - 1930 mm |
| Lowest lifting point | 98 mm |
| Lifting, lowering time (approx.) | 35/30 sec. |
| Power supply | 230 V |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 720 kg |

Optional accessory



Cross beams for the 1-Post-Lift
Item No.: TW125-Q
(2 pcs. in the set)

Set of cross beams for lifting vehicles with narrow frames such as off-road vehicles or pre-war vintage cars.

Further accessories can be found at www.twinbusch.co.uk

Further information to be found at www.twinbusch.co.uk



Scissor lift

Item No.: TWSA-40

kg 4000 kg **1,90 m** **400 V** **Autom.**

Description

The drive-on TWSA-40 scissor lift for surface mounting has an ultra-flat construction (only 200 mm height) and is therefore also ideally suited for sports cars. The integrated wheel free lift allows the complete vehicle (car) to be lifted with all four wheels free for wheel alignment. A ratchet system for the safety catches. Furthermore, the TWSA-40 is also ideally suited as an service lift and headlight test station.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- CE-Stop and signal tone when lowering (foot protection)
- Hydraulic synchronous control (cylinder displacement principle)
- Automatic safety-lock-release system
- High quality solid construction
- Wheel free lift with extensions for a longer lifting area
- Emergency lowering valve
- Compressed air of 4-8 bar required
- Ramp with anti roll off safety

Delivery contents

- Lift incl. Power unit
- Axle free jack | Rubber blocks
- Sliding plates
- 6 cover plates (turntable is optional)
- English instruction manuals
- Examination book | CE-Certificate
- **Product video online**


Video




Product video



Ultra flat construction

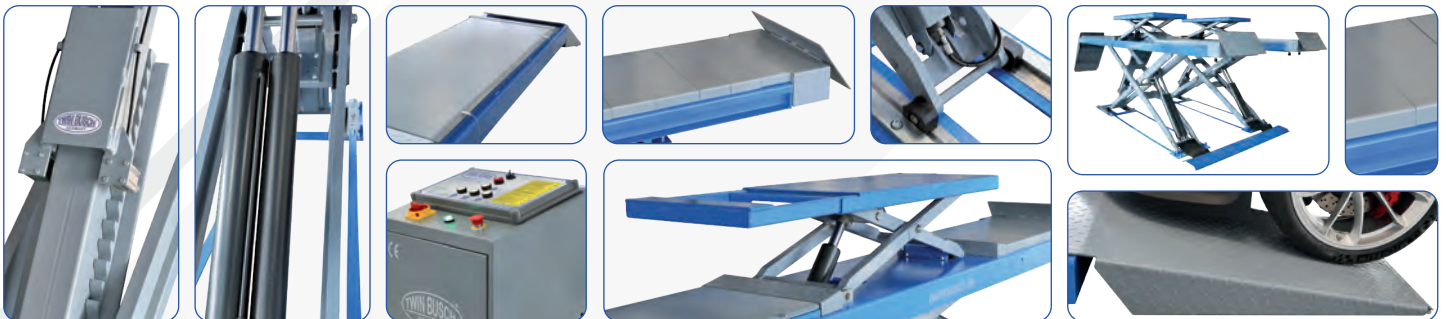

Dimensions

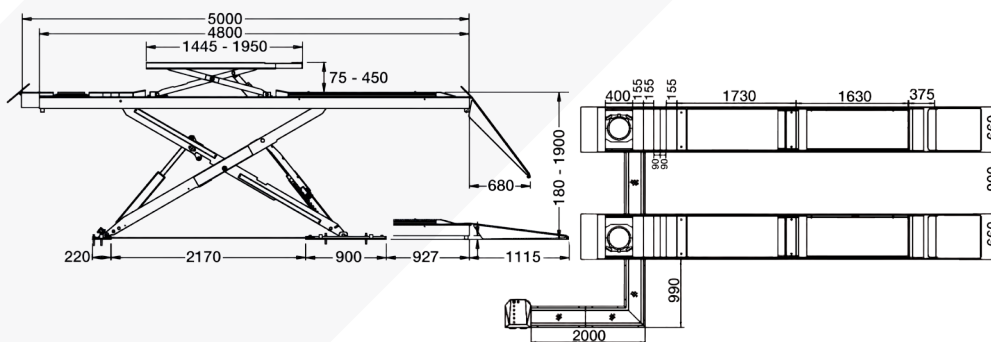

Technical Data

| | |
|------------------------|-----------------|
| Lifting capacity | 4000 kg |
| Lifting height max. | 1900 + 450 mm |
| Platform L./ W. | 5000/660 mm |
| Lifting time (approx.) | 45/30 sec. |
| Power supply | 400 V / 3 Phase |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 2450 kg |

Optional accessory



Turntable
Item No.: TW445-D

Further information to be found at www.twinbusch.co.uk

Further accessories can be found at www.twinbusch.co.uk

Scissor lift | Under floor

Item No.: TWSA-42U / TWSA-42U-G

kg 4200 kg **↑** 2,04 m **⚡** 400 V **⚙️** Autom.



Choice of colour:



RAL 5015
TWSA-42U



RAL 7016
TWSA-42U-G



Description

Lifting platform lift for level floor installation with integrated wheel free lift. The integrated wheel free lift allows the complete vehicle (car) to be lifted with all four wheels free. Furthermore, the TWSA-42U has rails fitted in the ramps, which allows the use of an additional wheel free jack (TW445-W). With integrated LED lighting on both sides of the complete length of the ramp. Also suitable as an MOT working lift or as a headlight testing station.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- CE-Stop and signal tone when lowering
- Hydraulic Synchronization control
- Free wheel jack with extensions
- Rails for the usage of a jack
- Automatic safety-lock-release system
- Ramp with anti roll off safety
- LED lighting possibilities on the lift
- Compressed air of 4-8 bar
- **ANTI LIFT UP-Button** for precise lifting of the platform. This button temporarily overrides the automatic / time switching relays of the platform

Delivery contents

- Lift incl. Power unit
- Axle free jack | Rubber blocks
- Sliding plates
- 6 cover plates (turntable is optional)
- Examination book | CE-Certificate
- English instruction manuals
- **Assembly video online | Product video online**






Videos





Product video



Assembly video



Dimensions

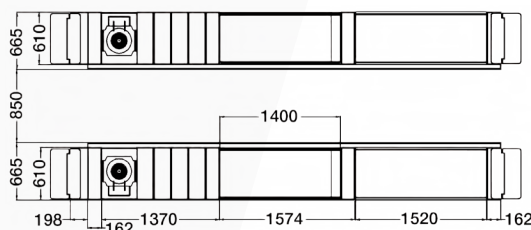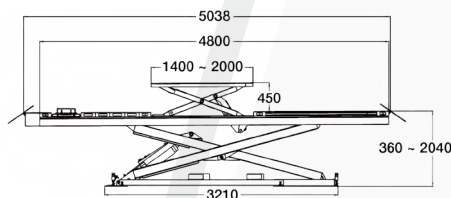

Technical Data

| | |
|----------------------------------|-----------------|
| Lifting capacity | 4200 kg |
| Lifting height max. | 2040 + 450 mm |
| Platform L./ W. | 5000/610 mm |
| Lifting, lowering time (approx.) | 45/45 sec. |
| Power supply | 400 V / 3 Phase |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 2050 kg |

Optional accessory

Further information to be found at www.twinbusch.co.uk



Turntable
Item No.:
TW445-D




Axle free jack
Item No.: TW445-W

Further accessories can be found at www.twinbusch.co.uk



Choice of colour:



Double Scissor lift

Item No.: TWS3-19E / TWS3-19E-G

kg 3000 kg **↑ 1,85 m** **230 V or 400 V** **Autom.**

Description

On floor scissor lift. Due to its ultra-flat profile, you are able to lift very low sports cars. Double cylinders and a rocker arm system provide powerful lifting capabilities.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Acoustic Warning signal (foot protection)
- **IR-System (Light beam constantly ensures both platforms remain synchronised)**
- **Electromagnetic safety release**
- Hydraulic synchronisation
- Automatic safety-lock-release system
- No restricting crossbar
- Rocker arm system
- High quality solid construction
- Emergency lowering valve
- Ultra low profil
- Comfortable and easy-to-use control panel


Delivery contents

- Lift incl. Power unit
- Rubber blocks (40 mm)
- Heavy duty anchor bolts (8 pcs.)
- English instruction manual
- Examination book and CE-Certificate
- **Product video online**


Videos



Vehicle type / Wheelbase

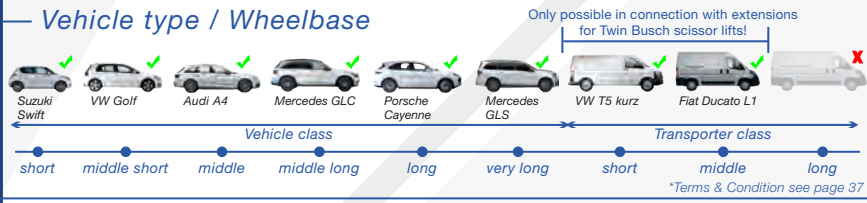

Dimensions

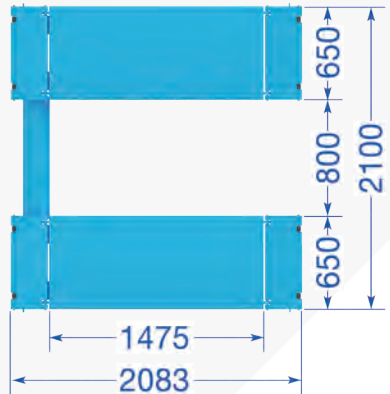

Technical Data

| | |
|----------------------------------|------------------|
| Lifting capacity | 3000 kg |
| Lifting height max. | 1850 mm + Rubber |
| Drive on height | 110 mm |
| Lifting, lowering time (approx.) | 45/30 sec. |
| Power supply | 400 V / 230 V |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 960 kg |

Optional accessory



Further accessories can be found at www.twinbusch.co.uk

Further information to be found at www.twinbusch.co.uk

Scissor lift | Under floor

Item No.: TWS3-18U / TWS3-18U-G

kg 3000 kg **↑ 1,80 m** **230 V or 400 V** **Autom.**

Description

Scissor lift TWS3-18U designed for under floor assembly. Ground level. It is the perfect lift for very low sports cars. Extendable runways (400 mm) allow you to lift vehicles with a long wheelbase.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Acoustic Warning signal (foot protection)
- **IR-System (Light beam constantly ensures both platforms remain synchronised)**
- Hydraulic cylinders for powerful lifting and lowering
- High quality solid construction
- Automatic safety-lock-release system
- Platform extensions 400 mm
- Emergency lowering valve
- Extendable platforms
- Compressed air of 4-8 bar required
- Comfortable and easy-to-use control panel
- Lowers to ground level

Delivery contents

- Lift incl. Power unit
- Rubber blocks (40 mm)
- Heavy duty anchor bolts (8 pcs.)
- English instruction manuals
- Examination book | CE-Certificate
- **Assembly video online**
- **Product video online**



Choice of colour:


RAL 5015 or **RAL 7016**
TWS3-18U TWS3-18U-G



Videos




Vehicle type / Wheelbase

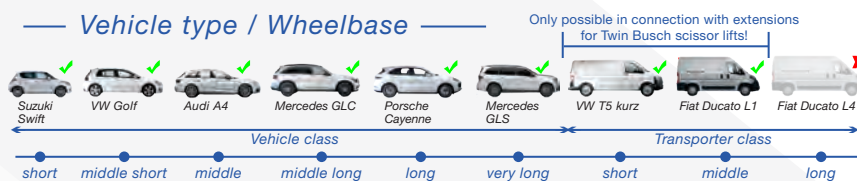

*Terms & Condition see page 37



Dimensions

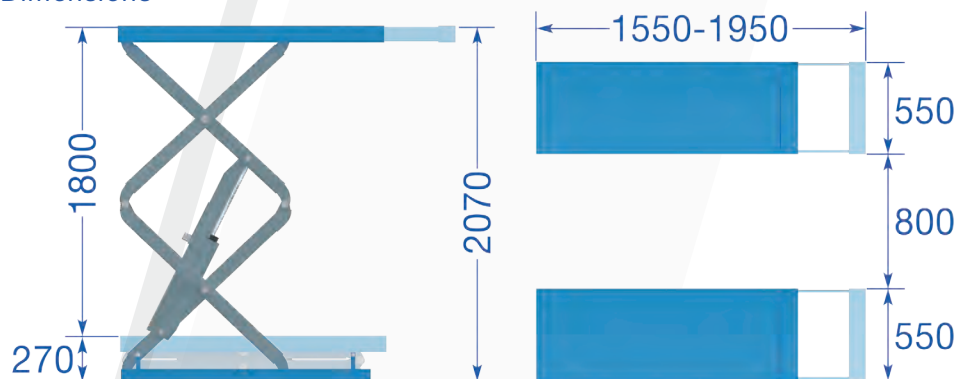

Technical Data

| | |
|----------------------------------|------------------|
| Lifting capacity | 3000 kg |
| Lifting height max. | 1800 mm + Rubber |
| Drive on height | in floor (0 mm) |
| Lifting, lowering time (approx.) | 45/45 sec. |
| Power supply | 400 V / 230 V |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 860 kg |

Optional accessory

Further information to be found at www.twinbusch.co.uk



Cross beam for TWIN BUSCH scissor lifts
Item No.: TWS3-Q
2 pcs. in the set



Extension for TWIN BUSCH scissor lifts
Item no.: TWS3-V
2 pcs. in the set

Further accessories can be found at www.twinbusch.co.uk



Electromagnetic safety release
(no compressed air required)
Thus, extremely flexible, since only a corresponding power connection is required!

Low rise scissor lift

Item No.: TWS35-10E

kg 3500 kg **1,00 m** **230 V or 400 V** **Autom.**

Description

Tyre service scissor lift with 1 m lifting height and 3500 kg load capacity. For lifting cars up to 3.5 t. Optimal for tyre services, car body construction, vehicle preparation. The scissor lift can be moved by the mobile kit (optionally available) and can therefore be used as an additional workplace on any sufficiently paved ground, such as asphalt, paving or concrete floor. With electromagnetic release (no compressed air connection is required). Lockable, fully loadable drive-up ramps for a longer pickup area.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Mechanical synchronization control of both lifting platforms for perfect synchronism
- Low drive over height (110 mm)
- **FAILSAFE safety lock system (monitoring of the detent position)** | Rocker arm system
- **Double line system for symmetrical distribution of the system pressure**
- High quality solid construction
- Emergency lowering function in case of power failure
- **Direct actuation by two powerful hydraulic cylinders**
- Automatic safety lock | Foot protection
- Acoustic warning signal (foot protection)
- High quality powder coating



Delivery contents

- Lift incl. Power unit | Rubber blocks
- English instruction manual
- Examination book | CE-Certificate
- **Assembly video online | Product video online**


Videos



Vehicle type / Wheelbase

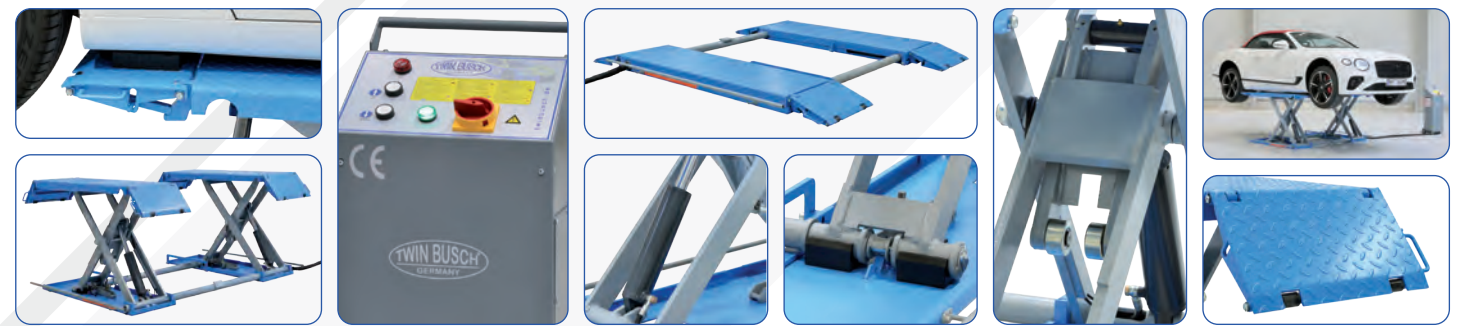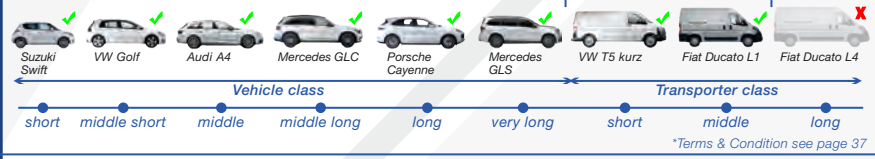

Dimensions

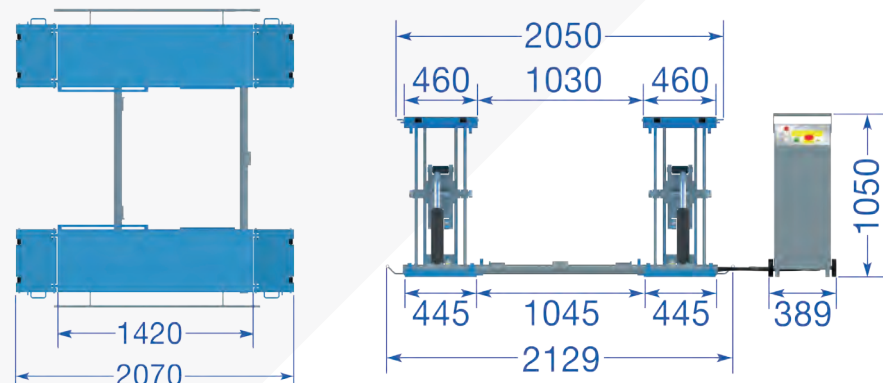


Technical Data

| | |
|----------------------------------|------------------|
| Lifting capacity | 3500 kg |
| Lifting height max. | 1000 mm + Rubber |
| Drive on height | 110 mm |
| Lifting, lowering time (approx.) | 20/20 sec. |
| Power supply | 400 V or 230 V |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 550 kg |

Optional accessory



Mobile kit
Item No.: TWS3-10-A
The ideal accessory for your TWS3510E

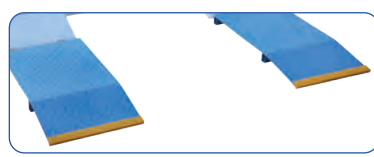

Drive on ramps
Item No.: TWS3-10-R
4 pieces in the set
Perfect for sport cars

Further accessories can be found at www.twinbusch.co.uk

Low rise scissor lift

Item No.: TWS3-10E /-G / TWS3-10E-FZ

kg 3000 kg **1,00 m** **230 V or 400 V** **Autom.**

Description

Low rise scissor lift.

1000 mm lifting height. Ideal for tyre service, painting and body work. With electromagnetic release.

No compressed air supply is required. The platform can be lengthened by locking the drive on ramps.

A very practical mobile kit is available as an option.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Mechanical synchronization control of both lifting platforms for perfect synchronism
- Low drive over height (110 mm)
- **FAILSAFE safety lock system (monitoring of the detent position)**
- **Double line system for symmetrical distribution of the system pressure**
- High quality solid construction
- Emergency lowering function in case of power failure
- **Direct actuation by two powerful hydraulic cylinders**
- Automatic safety lock
- Foot protection
- Acoustic warning signal (foot protection)
- High quality powder coating

Delivery contents

- Lift incl. Power unit | Rubber blocks
- English instruction manual
- Examination book | CE-Certificate
- **Assembly video online**
- **Product video online**



Item No.:
TWS3-10E



Electromagnetic safety release
(no compressed air required)

Thus, extremely flexible, since only
acoresponding power connection is required!

— Available in the following versions



Item No.:
TWS3-10E-G

Anthracite!



Item No.:
TWS3-10E-FZ

Galvanized!

Videos




Product
video

Assembly
video





Vehicle type / Wheelbase

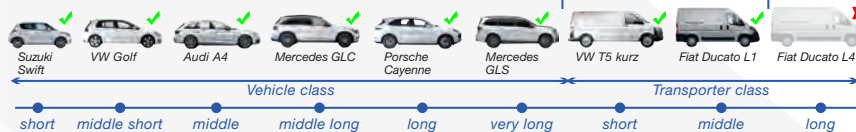

*Terms & Condition see page 37



Dimensions

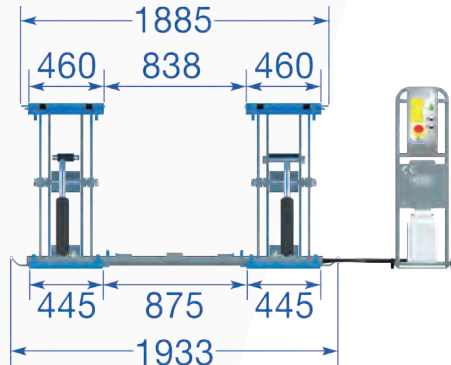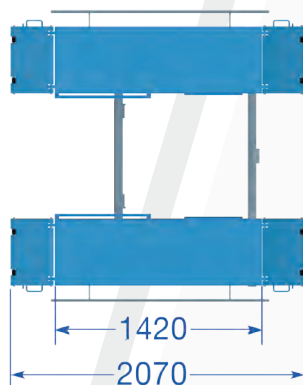

Further information to be found at www.twinbusch.co.uk

Technical Data


| | |
|----------------------------------|------------------|
| Lifting capacity | 3000 kg |
| Lifting height max. | 1000 mm + Rubber |
| Drive on height | 110 mm |
| Lifting, lowering time (approx.) | 20/20 sec. |
| Power supply | 400 V or 230 V |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 500 kg |

**Please note: The TWS3-10E-FZ is only available in 400-volt.

Optional accessory



Mobile kit
Item No.: TWS3-10-A
The ideal accessory
for your TWS3-10E



Drive on ramps
Item No.: TWS3-10-R
4 pieces in the set
Perfect for sport cars

Available in the following versions



Further accessories can be found at www.twinbusch.co.uk



1-post parking lift - GREY-Line

Item No.: TW127P-G

2700 kg
2,10 m
230 V
Autom.

Description

The innovative 1-post parking lift with automatic unlocking. Due to the design with only one column, a significantly smaller footprint is required than, for example, with a 2- or 4-post parking lift, making it ideal for tight spaces. The control unit on the column ensures comfortable lifting and lowering of the parking platform. The design with only one column ensures ideal access to the vehicle. With an underide height of 1890 mm (without roll-off protection), a clearance height (floor to lower edge of platform) of 1970 mm and a load capacity of 2700 kg, the 1-post parking lift is also very well suited for high and also for heavier vehicles. The large footprint of the upper platform and the resulting parking space underneath result in extremely flexible parking and application possibilities.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- **Automatic unlocking (electromagnetic), no compressed air required**
- Safety locks for very long storage periods
- High quality column made from specially folded steel
- Single powerful hydraulic cylinder for lifting and lowering
- **Vehicle roll-off protection**
- High quality powder coating



Delivery contents

- Lift incl. Power unit | Heavy duty anchor bolts (10 pcs.)
- English instruction manual
- Examination book and CE-Certificate


Videos

Product video

Assembly video




Dimensions

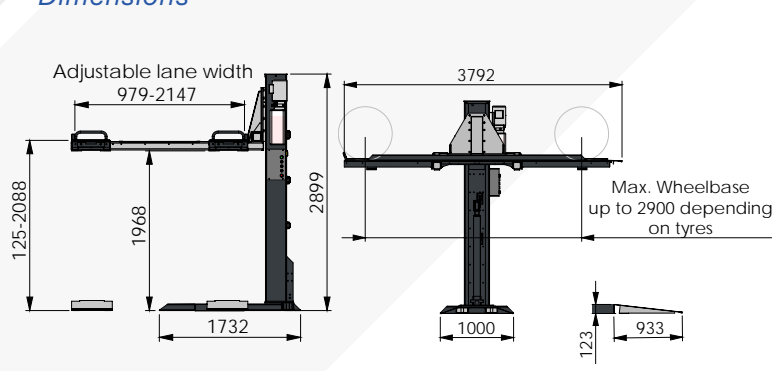


Technical Data

| | |
|----------------------------------|---------------|
| Lifting capacity | 2700 kg |
| Lifting height max. | 165 - 2100 mm |
| Platform length (Total) | 3620 mm |
| Platform width | 475 mm |
| Wheelbase length | up to 2900 mm |
| Lifting, lowering time (approx.) | 45/30 sec. |
| Power supply | 230 V |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 1300 kg |

Optional accessory

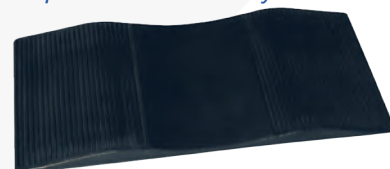

Rubber tyre protector
Item No.: TW436P-GRS

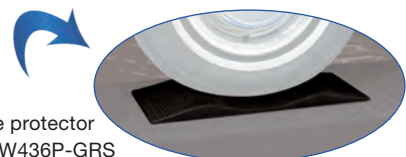

Further accessories can be found at www.twinbusch.co.uk

Two post parking lift - GREY-Line

Item No.: TW227P-G

kg 2700 kg **↑** 2,20 m **⚡** 230 V **⚙️** Autom.

Description

The practical two post parking lift with electromagnetic safety lock release. Space saving construction. Using only two posts this lift uses up less space than a conventional four post parking lift. It is possible to expand this lift to the left or right as many times as required. Easy lifting and lowering using the forward mounted control panel. With its 2100 mm maximum lifting height and 2700 kg maximum loading weight, this two post parking lift is ideal for large and heavy vehicles such as large SUVs or a VW T6 for example. The solidly constructed galvanized platform offers protection from oil and dirt damaging the vehicle parked below.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- **Automatic safety lock release, no compressed air necessary**
- **Safety locks secure the lift for extreme long periods of time**
- **Completely closed galvanized platform**
- High quality special profile supporting posts
- Hydraulic lowering valve
- Two hydraulic cylinders for powerful lifting / lowering
- Roll off protection
- High quality powder coating
- Acoustic warning signal

Delivery contents

- Lift incl. Power unit
- English instruction manual
- Examination book
- CE-Certificate
- **Assembly video online**
- **Product video online**



The closed parking platform protects the lower parking space from oil and dirt

Videos




Product video

Assembly video



Dimensions

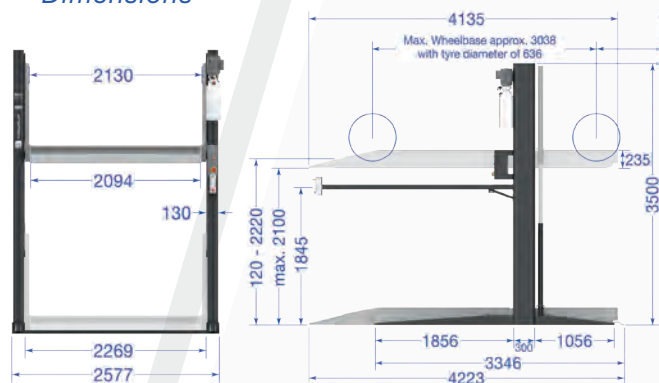


Technical Data


When the TW 227P is extended to a multiple parker, the centre column can be used for both lifts reducing the overall width.

| | |
|----------------------------------|---------------|
| Lifting capacity | 2700 kg |
| Lifting height max. | 130 - 2200 mm |
| Platform length (Total) | 4135 mm |
| Platform width | 2100 mm |
| Lifting, lowering time (approx.) | 45/30 sec. |
| Power supply | 230 V |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 1150 kg |

Optional accessory

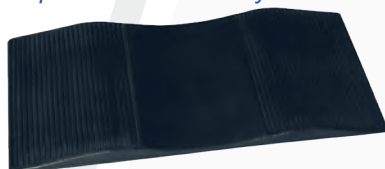

Rubber tyre protector
Item No.: TW436P-GRS

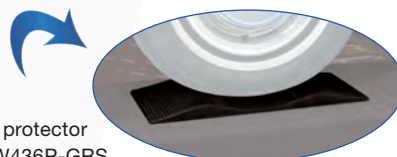

Further accessories can be found at www.twinbusch.co.uk

4-Post-parking lift - GREY-Line

Item No.: TW436P-G

kg 3600 kg **↑ 1,90 m** **⚡ 230 V** **🔧 Semi-auto.**

Description

The practical 4 post parking lift.

With its optional mobile kit you can use this lift in very tight spaces and with the optional offset motor brackets you can assemble more lifts along side of each other.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Hydraulic overflow valve
- A hydraulic cylinder underneath the runway provides powerful lifting and lowering capabilities
- Mechanical safety lock
- Manual safety-lock-release
- Cable break safety device
- Roll on-off protection
- Foot protection
- Acoustic warning signal
- Wide drive on ramps
- Easy to use control unit (Safety rate to IP 54)

Delivery contents

- Lift incl. Power unit
- Examination book and CE-Certificate
- Wheel chocks included (2 pcs.)
- **Assembly video online**
- **Product video online**



Included

Wheel chocks
(2 pcs.)



Videos



Product
video




Assembly
video




Dimensions

Maximum vehicle wheel base (under the lift): 2040 mm
Maximum width between posts: 2380 mm
Maximum width on the lift: 2280 mm
Secured clearance: ca. 1730 mm

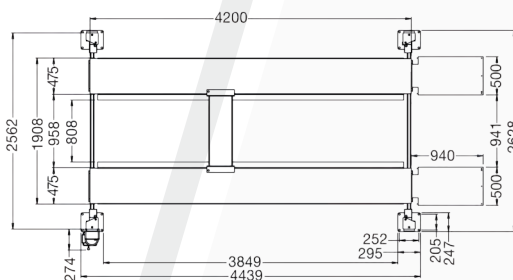

First catch position (adjustable)
at approximately 450 mm
(safety 100 mm apart)

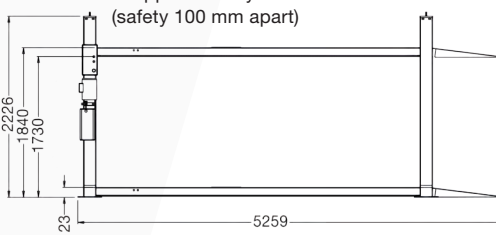

Technical Data

| | |
|----------------------------------|---------------|
| Lifting capacity | 3600 kg |
| Lifting height max. | 1900 mm |
| Runway (L./W.) | 4094/475 mm |
| Lifting, lowering time (approx.) | 45/30 sec. |
| Power supply | 230 V |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 830 kg |

Optional accessory

Mobile kit | Item No.:
TW436P-RK



Offset plates
Item No.:
TW436P-VP



Jacking beam
Item No.: TW436PW-G




LED lighting
(LED-KIT)
Item No.:
TWLED-4P



Fitted shelves (8
units) | Item No.:
TW436P-EB



Oil drip tray
Item No.: TW436P-ÖLW



Further accessories can be found at www.twinbusch.co.uk

Further information to be found at www.twinbusch.co.uk



Turn 1 into 3
**There are 3 cars parked
on top of each other
in just one parking space!**

Triplex 3-compartment car park lift

Item No.: TW445P-H3-G

kg 2500 kg + 2000 kg **↑** 2,03 m **⚡** 400 V **⚙️** Autom.

Description

The TW445P-H3-G triplex 3-compartment parking lift converts a conventional parking space into 3 parking spaces one above the other. The TW445P-H3 parking system has two platforms for independent parking. The upper platform is parked first, followed by the platform below and then (if both platforms are raised) the third car is parked on the floor area. This is a single system for three suitable vehicles. Due to the design of the 4 pillars, a relatively small amount of floor space is required and at the same time only the corresponding footprint of the compact overall system is needed, ideal for tight spaces. The forward-facing control unit with a key switch ensures convenient lifting and lowering of the parking platforms. With a large underride height of 1850 mm on parking space no. 1 on the ground, the first parking space is also accessible for large SUVs. The 2nd level is suitable for vehicles with a total weight of up to 2500 kg and a height of 1650 mm, on the 3rd level vehicles up to 2000 kg are permitted, the height of the vehicle depends on its ceiling or hall height. Thanks to the unique design of the 2 platforms that interlock, the Triplex 3-storey car park lift has the lowest drive-on height of any 3-storey car park on the market, making it ideal for low vehicles such as sports cars or racing cars.


Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Hydraulic overload valve
- A hydraulic cylinder under the driving surface ensures powerful lifting and lowering
- Mechanical safety catches
- Automatic unlocking of the safety catches
- Slack rope and rope breakage protection


Delivery contents

- Lift incl. Power unit
- Examination book and CE-Certificate
- 2 Access ramp
- Roll-off protection

Videos

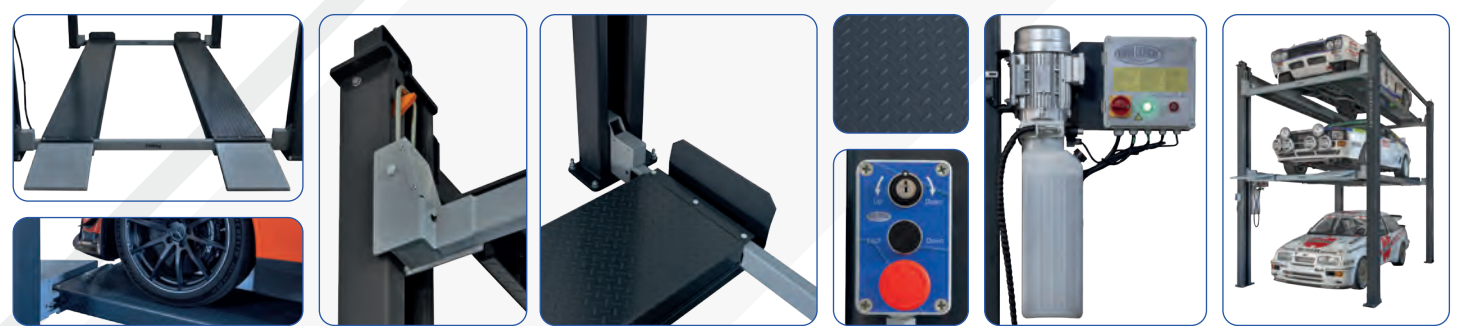


Dimensions

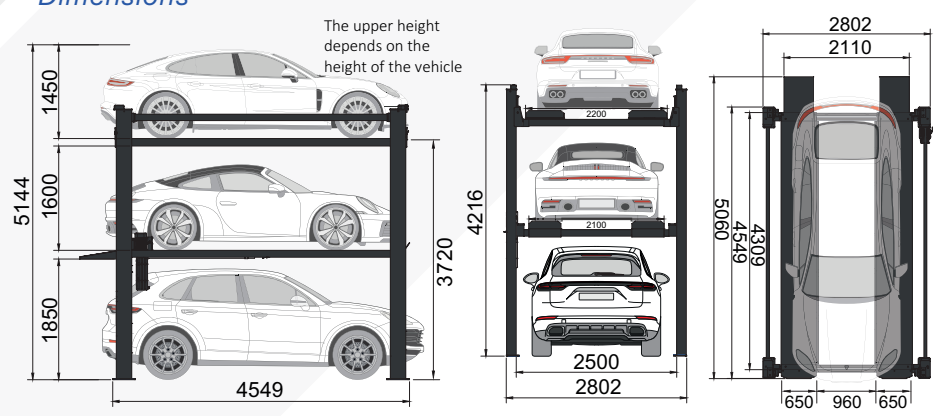

Technical Data

| | |
|---------------------|---|
| Lifting capacity | Pitch 1 (ground): unlimited, Pitch 2: 2500 kg, Pitch 3: 2000 kg |
| Lifting height max. | Until pitch 2: 2030 mm / Until pitch 3: 3720 mm |
| Runway length | 5060 mm (incl. ramps) |
| Runway width | Pitch 2: 2120 mm / Pitch 3: 2220 mm |
| Power supply | 400 V |
| Motor power | 3,0 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 1700 kg |

Optional accessory

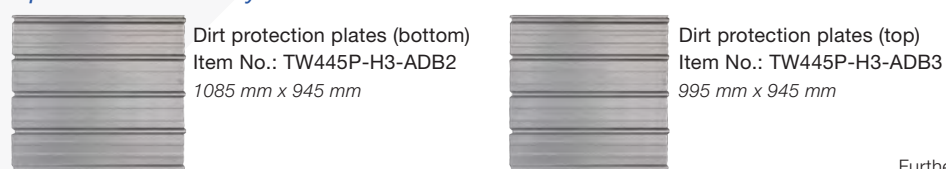

Dirt protection plates (bottom)
Item No.: TW445P-H3-ADB2
1085 mm x 945 mm

Dirt protection plates (top)
Item No.: TW445P-H3-ADB3
995 mm x 945 mm

Further accessories can be found at www.twinbusch.co.uk

4-Post-Lift

Item No.: TW445

kg 4500 kg **↑ 1,85 m** **⚡ 400 V**  semi auto.

Description

Electro-hydraulic four-post lift.

With rear squirm plates and front recesses for optional turntables. This lift is ideal for wheel alignment and all other service work. Jacking beam also optionally available.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Lift capacity 4500 kg
- CE-Certificate
- IP 54 24V control box
- 24 V limit switch
- Hydraulic overflow valve
- Roll off protection
- Safety lock for entire lifting height
- Cable break safety device
- Sliding plates
- Foot protection
- Acoustic warning signal

Delivery contents

- Lift incl. Power unit
- Heavy duty anchor bolts (16 pcs.)
- Examination book and CE-Certificate
- *Optional: Turntables (TW445-D)*
- *Optional: Jacking beam (2 t / Pneumatic) (TW445-W)*
- *Optional: Drive on ramp (TW445-R)*
- *Optional: Runway extensions front (TW445-V) and rear (TW445-H)*
- *Assembly video online | Product video online*



TW445-V

Videos




YouTube



Product video





Assembly video



Dimensions

Minimal wheel base for the alignment: 1600 mm
Maximum wheel base for the alignment: 3700 mm | Maximum wheel base for the lift: 4320 mm
Total length of the lift (including ramps): 5867 mm
Foundation requirement: (L) 5140 mm x (W) 3400 mm x (concrete strength C20/25) 150 mm

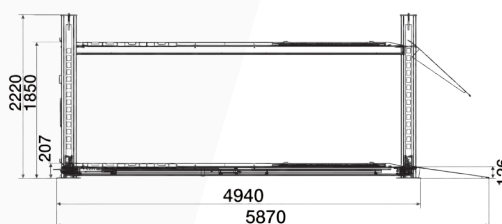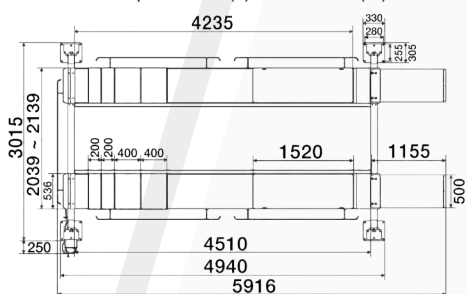


Further information to be found at www.twinbusch.de

Technical Data

| | |
|------------------------|-----------------|
| Lifting capacity | 4500 kg |
| Lifting height max. | 1850 mm |
| Runway length | 4510 mm |
| Runway width | 536 mm |
| Drive on height | 126 mm |
| Lifting time (approx.) | 50 sec. |
| Power supply | 400 V / 3 Phase |
| Motor power | 2,2 kW |
| Fusing | 16 A / type C |
| Weight (approx.) | 1400 kg |


Optional accessory



Turntables
Item No.: TW445-D
Turntables for wheel alignment



Jacking beam
Item No.: TW445-W



Runway extensions
(front) Item No.: TW445-V
2 piece in the set
Runway extensions
(rear) Item No.: TW445-H
2 piece in the set



Drive on ramp
Item No.: TW445-R
2 piece in the set

Further accessories can be found at www.twinbusch.co.uk



HGVLift (22 t, 33 t, 30 t or 45 t)

Item No.: 550-4 (22 t) | 550-6 (33 t) | 575-4 (30 t) | 575-6 (45 t)

1,60 m
 400 V
 Autom.



Item No.:
 TW550-4 / TW575-4

The 4-series can be upgraded
 to a 6-series version at any time.
 The main column generally
 has 6 connections.



Item No.:
 TW550-6 / TW575-6



Also suitable
 for camper
 vans

Video

Product
 video

Description

Mobile HGV lift:
 22 and 30 t – Available in a 4 wheel version
 33 and 47 t – Available in a 6 wheel version
 Ideal for confined spaces, these lifts can be moved as
 easily as a pallet truck on all hard even surfaces.
 Robust in design.

Features


- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Top quality solid construction
- Can be controlled from every column
- Control can be switched from a single, to a combined lift
- Easy to move
- 4 or 6 electrical motors provide powerful lifting capability
- Transporter adapters optionally available

Delivery contents

- Complete HGV lift
- English instruction manuals
- Examination book
- CE-Certificate
- Optional: Adapters for the TW HGVLift (enables you to lift small transporters and trucks)
- **Product video online**



Dimensions

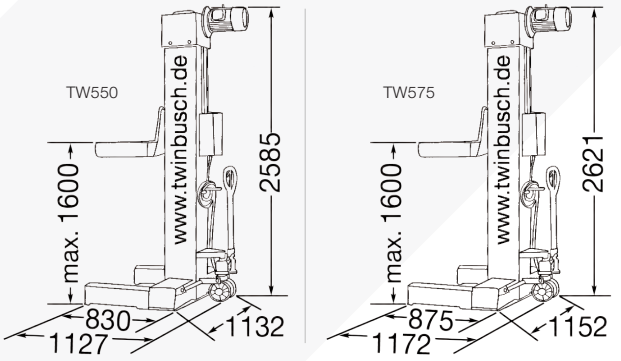


Technical Data

| Technical Data | 550-4 | 550-6 | 575-4 | 575-6 |
|----------------------------------|---------------|---------------|---------------|---------------|
| Lifting capacity | 22000 kg | 33000 kg | 30000 kg | 45000 kg |
| Per post | 5500 kg | 5500 kg | 7500 kg | 7500 kg |
| Lifting height max. | 1600 mm | 1600 mm | 1600 mm | 1600 mm |
| Lifting, lowering time (approx.) | 10 mm/s | 10 mm/s | 10 mm/s | 10 mm/s |
| Power supply | 400 V / 3 Ph. | 400 V / 3 Ph. | 400 V / 3 Ph. | 400 V / 3 Ph. |
| Motor power | 4 x 3,0 kW | 6 x 3,0 kW | 4 x 3,0 kW | 6 x 3,0 kW |
| Fusing | 32 A (type C) | 32 A (type C) | 32 A (type C) | 32 A (type C) |
| Weight (approx.) | 2400 kg | 3600 kg | 3000 kg | 4500 kg |

Further information to be found at www.twinbusch.co.uk

Optional accessory



Adapter for TW-Truck lift
 Item No.: TW550-AD
 For the lifting of transporters
 and light trucks




Axle Stand with 7500 kg capacity
 Item No.: TW575-1

Further accessories can be found at www.twinbusch.co.uk

HGV-lift Battery-powered and wireless

Item No.: TW580W-4 (32 t) | TW580W-6 (48 t)



Description

It is also ideal for confined spaces, can be moved as easily as a pallet truck and can be used on any level, sufficiently firm floor. The hydraulic wheel gripper system is battery-operated, the charger is integrated into each lifting column and the battery pack inside is charged at a standard household socket (230 V). The individual lifting columns communicate with each other completely wirelessly via a secure radio link. They are conveniently controlled via a touch screen with real-time monitoring and display of the lifting height. Only authorised users with an ID card can access the system. Adjustable wheel holder for a tyre diameter of 600 - 1250 mm, enabling flexible and fast lifting of vans, motorhomes, light commercial vehicles, trucks and even agricultural machinery.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- High-quality support columns made from special rolled profile
- **Control can be operated from any column**
- **Control can be switched to individual or joint lifting**
- **The wheel grippers are easy to move**
- 4 or 6 powerful electric motors for lifting
- Completely wireless use via a secure radio connection
- **Lifting columns are battery-operated, integrated charger**
- **Operation via touch screen, control from any column possible**
- Safety Lock System for lowering the load into the safety lock
- Emergency stop switch in each column
- Adjustable wheel holder for a tyre diameter of 600 - 1250 mm
- User access via ID cards

Delivery contents

- Complete HGV lift | Charging cable
- English instruction manuals | Examination book | CE-Certificate
- **Assembly video online | Product video online**



The 4-unit version can be upgraded to a 6-unit version at any time.

Up to 48 columns can be connected to each other.




Videos




Product video



Assembly video



Dimensions

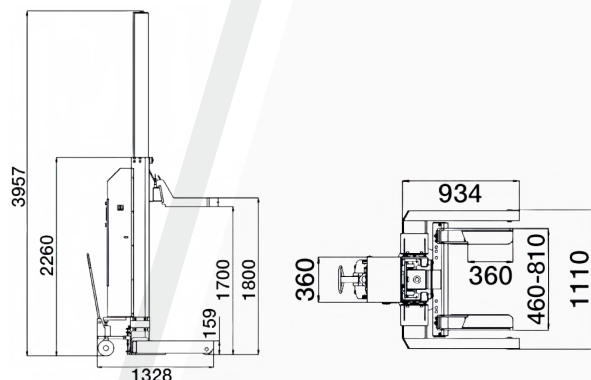

Technical Data

| Technical Data | TW580W-4 | TW580W-6 |
|----------------------------------|-----------------|-----------------|
| Lifting capacity | 32000 kg | 48000 kg |
| Per post | 8000 kg | 8000 kg |
| Lifting height max. | 1800 mm | 1800 mm |
| Lifting, lowering time (approx.) | 18 mm/s | 18 mm/s |
| Power supply | 24 V | 24 V |
| Motor power | 4x2,2 kW DC 24V | 4x2,2 kW DC 24V |
| Charging voltage | 230 V | 230 V |
| Weight (approx.) | 770 kg per Post | 770 kg per Post |

Further information to be found at www.twinbusch.co.uk

Optional accessory



Axle Stand with 7500 kg capacity
Item No.: TW575-1

Further accessories can be found at www.twinbusch.co.uk



Motorcycle lift

Item No.: TWM02

kg 500 kg **1,20 m** **230 V**

Description


With the TWM-02 motorcycle lift you have an extremely massive hydraulic scissor lift for motorcycles (for large machines such as Chopper, Tourer, etc.) and scooters weighing up to 500 kg. A powerful electric motor makes for comfortable lifting and lowering of your two-wheelers.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Very solid construction with a powerful electric motor
- Non-slip, ribbed working surface
- Integrated swing plate for back wheel removal
- Foot pedals on both sides for comfortable lifting and lowering of your Bikes
- Ramp moves automatically away from the working area when lifting
- Pneumatic control for front wheel clamping
- Four wheels with integrated brakes
- Compressed air of 6-8 bar

Delivery contents

- Motorcycle lift
- English instruction manuals
- CE-Certificate
- *Assembly video online*
- *Product video online*



Powerful electric motor with hydraulic drive

Videos




Product video



Assembly video



Dimensions

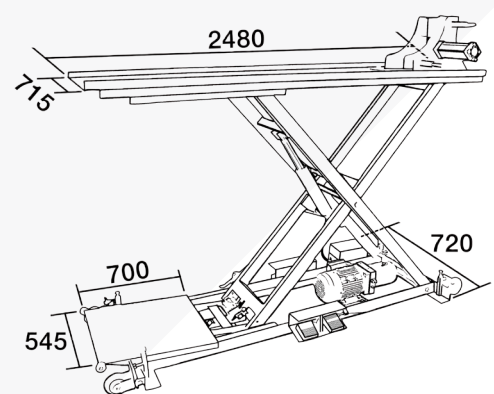

Whole length including ramps: 3180 mm
Maximum lifting height: 1200 mm

Technical Data

| | |
|----------------------------------|---------|
| Lifting capacity | 500 kg |
| Lifting height max. | 1200 mm |
| Runway length | 2480 mm |
| Runway width | 715 mm |
| Lifting, lowering time (approx.) | 30 sec. |
| Motor power | 0.75 kW |
| Power supply | 230 V |
| Weight (approx.) | 285 kg |

Further accessories can be found at www.twinbusch.co.uk


4-Post-Lifts



Free wheel jack for TW445 / TWSA-42U

Item No.: TW445-W


- It can be moved individually on your 4-post lift, scissor lift or pit using appropriate guide rollers.
- Drive: Pneumatic - Hydraulic | Lifting capacity: 2T
- Track width guide rollers: 850 - 1160 mm
- Maximum extension support arms: 800 - 1500 mm
- **Not available for the TW436P-G/TW436PD2-G/TW445 (2016 model or older)!**



Runway extensions

Item No.: TW445-V

- Suitable for your TW445
- 2 pieces in the set
- Lengthen your platform at the front by 600 mm



Runway extensions

Item No.: TW445-H


- Suitable for your TW445
- 2 pieces in the set
- Lengthen your platform at the rear by 600 mm

The TW445-V Runway Extender lengthens the runway of the TW445 to 5186 mm. This means vans up to a wheelbase of 4855 mm can be lifted and the wheel alignment feature can be used up to a wheelbase of 4480 mm. Vans with a wheelbase of up to 5385 mm can be lifted using both the TW445-V and the TW445-H runway extenders which extend the runway to a total length of 5716 mm.



Turntables | Item No.: TW445-D

- To check the caster
- Scale range +/-50°
- Simple zero
- 2 Turntables in a set
- **Perfect accessory to your 4-post lift TW445!**



Ramps for TW445

Item No.: TW445-R

- Allows you to drive off the front of the ramp after driving on forwards. So it is not necessary to drive the vehicle backwards off the lift.
- **Perfect accessory to your 4-post lift TW445!**



Oil drip tray for the TW436P

Item No.: TW436P-ÖLW

- To protect the lower vehicle
- Practical oil drip tray
- **Perfect accessory to your 4-post parking lift TW436P-G and TW436PD2-G**



Mobile kit for TW436P-G and TW436PD2-G

Item No.: TW436P-RK

- Fast and easy installation
- 4 pieces in the set
- For more flexibility
- Your parking lift is very easy to move with the mobile kit
- **Perfect accessory to your 4-post parking lift!**



Angle plates for your 4-post parking lift

Item No.: TW436P-VP


- For turning the hydraulic and control unit 90 degrees to the main post, reducing the overall width of the parking lift
- Ideal when installing in narrow garages or when installing several lifts side by side
- **Perfect accessory to your 4-post parking lift TW436P-G and TW436PD2-G!**




Jacking beam for the 4-Post-parking lift

Item No.: TW436P-W-G

- With adjustable sockets
- Hand hydraulics
- Maximum extension support arms: 820 - 1520 mm
- **Not available for the TW445!**
- **Perfect accessory to your 4-post parking lift TW436P-G and TW436PD2-G**



Scissor lift



2 pieces in the set

Extension

Item No.: TWS3-V

- Ideal for vehicles with large wheel base like the T5 (max wheelbase 2200 mm)
- **Fits all Twin Busch scissor lifts)**



2 pieces in the set

Cross beam

Item No.: TWS3-Q


- Set of cross beams for lifting vehicles with narrow frames such as off-road vehicles or pre-war vintage cars
- **Fits all Twin Busch scissor lifts)**



Mobile kit for TWS3-10E / TWS35-10E / TWS3-10E-FZ

Item No.: TWS3-10-A

- Quick and easy installation
- You can move your TWS3-10E around with the mobile kit
- **Perfect accessory to your TWS3-10E, TWS3-10E-FZ and TWS35-10E**



Ramp set for the TWS3-10E / TWS35-10E

Item No.: TWS3-10-R

- 2 Stage drive on height from only 55 mm
- 4 fixing plates to reduce slipping
- Easy to remove in a few seconds
- Ramp Measurements: 850 mm (L) x 460 mm (B) x 55 mm (H)
- **Perfect accessory to your TWS3-10E / TWS35-10E**

Available in the following versions




RAL 5015
TWS3-10-R



or
RAL 7016
TWS3-10-R-G



or
Galvanized
TWS3-10-R-FZ



Ramp set for the TWS3-19E

Item No.: TWS3-19-R

- 2 Stage drive on height from only 55 mm
- Ramp Measurements: 850 mm (L) x 650 mm (B) x 55 mm (H)

- Does not need to be fixed
- **Perfect accessory to your TWS3-19E**

Further accessories for your lift can be found at www.twinbusch.co.uk

*The illustrated vehicles are only an example to give you an understanding of different wheelbases and vehicle lengths. Of course, a variety of other vehicle manufacturers and models can be raised. If you have any questions, we are happy to advise you personally! +44 (0) 1536 522 960 oder info@twinbusch.co.uk

The vehicles shown were raised with the manufacturer's or alternative lifting points. Pay attention to our Twin Busch special adapters to ensure safe lifting, since some vehicles, especially in the transporter class, have no lifting points as with most cars. Always follow the relevant equipment regulations of the vehicle manufacturer. Always observe the usual safety precautions during lifting and lowering as well as the correct load distribution, maximum load and always read the manual of the lift.

Vehicle status: 2017, Subject to technical changes and errors. The Twin Busch GmbH provides this graphic exclusively for information purposes!

The Twin Busch GmbH is under no circumstances liable for recommendations from this graphic.